

WWXC-LED

Type:	
Job Name:	

Construction:



- Combination of steel and aluminum construction
- Diffuser is white smooth acrylic

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Canopy mounts to standard "J-Box"
- UL and CUL listed **DAMP** location
- 5-Year Warranty on LED Components
- CRI > 90
- Universal 120/277 volt standard

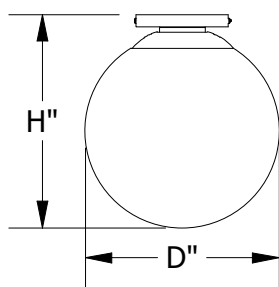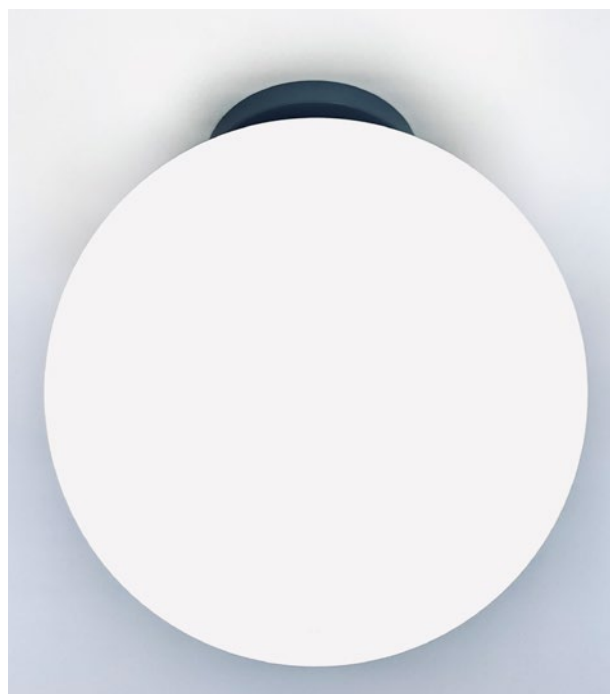

WWXH 12 - 14 - 16 - 18

Height: 13¼" 15¼" 17¼" 19¼"

Diameter: 12" 14" 16" 18"



ORDERING INFORMATION

Example: WWXC-12-LED-O4A-4-Z1-WSA-DIM

WWXC

Size	LED					Kelvin	Cage	Finish	Diffusers	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder A15 Medium Gray G13 Sage Green W18 Sand Fossil U13 Cornflower Blue	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v)
12-LED	O4A	24	3200	0-10v	NO					
	1E26		0	TRIAC/ELV	NO					
14-LED	O4A	24	3200	0-10v	NO					
	1E26		0	TRIAC/ELV	NO					
16-LED	O4A	24	3200	0-10v	NO					
	O4B	29	4000	0-10v	NO					
18-LED	O4A	24	3200	0-10v	NO					
	O4B	29	4000	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 Phone 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 www.lightwayind.com • sales@lightwayind.com



Revision: 07/20/2023