

BULW-LED

Construction:

- Steel housing and chassis

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Universal mounting plate
- Up/Down Light Standard
- Optional Aluminum construction
- Optional photocell (increases depth to 3.83" / Down Light only)
- Optional Downlight only available
- Optional battery backup (increases depth to 3.83"
- ADA compliant without photocell or battery backup
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components


BULW-9

Height - 4 3/4"

Width - 9 1/4"

Depth - 2 3/4"

Type:	
Job Name:	

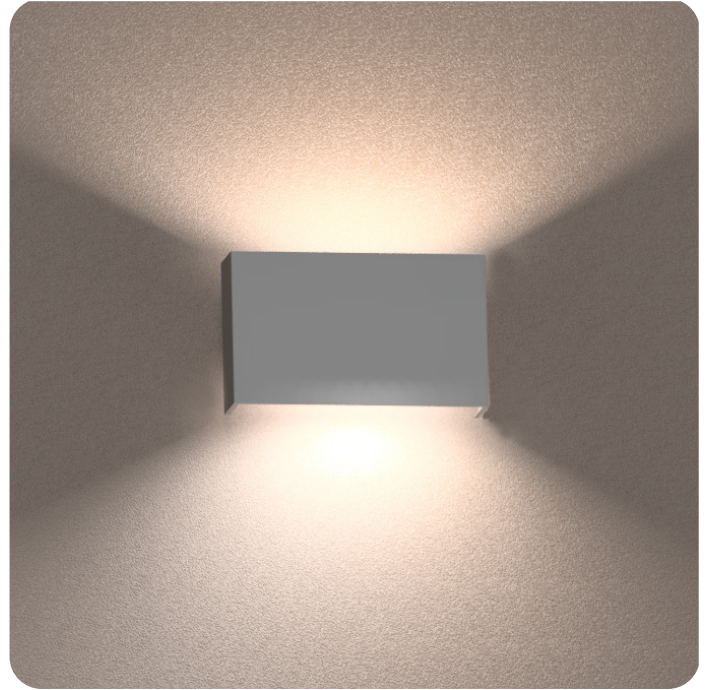

ORDERING INFORMATION

Example: BULW-9-LED-O2A16-4-Z1-DIM

BULW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
9-LED	O2A16	16	2122	0-10v	NO	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 York White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum		DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory DN Down Light Only (Not intended for uplight applications) 42 All Aluminum Construction 21 Photocell - See Notes -01 120 volt -02 277 volt Battery Backup Options (see notes) BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 www.lightwayind.com • sales@lightwayind.com

