

MITW-LED

Construction:

- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; Hardware Included
- Optional photocell (21) increases fixture depth 1 1/2"
- UL and CUL listed **WET** location
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

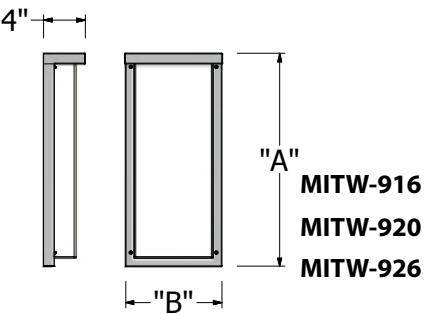

DIM 'A'	DIM 'B'	M.C.
16"	9"	8"
20"	9"	10"
26"	9"	13"

ORDERING INFORMATION

Example: MITW-920-LED-O6B29-3-Z3-WSA

MITW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
916-LED	O3C18	18	2420	0-10v	NO	2 3000K 3 3500K 4 4000K		B1 Satin Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
920-LED	O6B29	29	4000	0-10v	NO					21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt
926-LED	O6C18	18	2420	0-10v	NO					
	O6C36	36	4840	0-10v	NO					42 All Aluminum Construction
										Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

