

HOVW-LED

Construction:

- Steel housing and chassis
- Diffuser is .060" thick white textured polycarbonate


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Center lockup – hardware included
- Custom cage styles available
- ADA compliant
- Optional Battery Backup
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

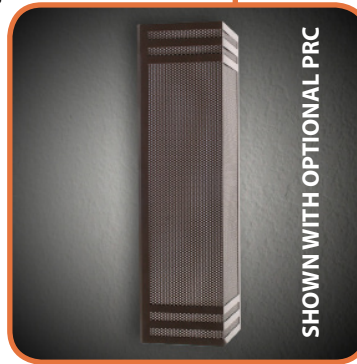

HOVW-13

Height - 13"
Width - 7 1/2"
Depth - 4"

HOVW-18

Height - 18"
Width - 7 1/2"
Depth - 4"



ORDERING INFORMATION

Example: HOVW-13-LED-O2B-4-B1-WTP-PRC

HOVW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WTP White Textured Polycarbonate Optional Cage Accent PRC Perforated Screen Complete	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory 90CRI Consult Factory Optional Voltage -347V Input voltage to 347v
13-LED	O2B	15	2000	0-10v	NO	Optional 3 3500K	Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum P9 Brushed Nickel		Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes	
18-LED	O2C	18	2420	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

