

RDCW-LED

Construction:

- Aluminum housing and chassis
- Window lens are white textured acrylic, optional alabaster acrylic or custom patterns
- Open top-see Notes for top lens

Light Source:


- LED
- Dimming to 10% **Included**

Notes:

- Keyhole slots for mounting to standard J-Box
- Open top (standard configuration)
- Optional perforated cover (-TL)
- Custom lens patterns available as option (XA)
- Custom cage styles (X) available
- ADA compliant
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

| | |
|-----------|--|
| Type: | |
| Job Name: | |

CAGE A

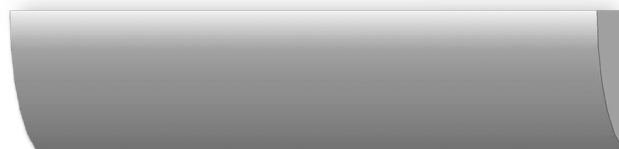

CAGE B



CAGE C



CAGE D



RDCW-16

Height - 5 1/2"
Width - 16"
Depth - 4"

RDCW-24

Height - 5 1/2"
Width - 24"
Depth - 4"



ORDERING INFORMATION

Example: RDCW-24-LED-O2C-4-T4-WTA

RDCW

| Size | LED | | | | | Kelvin | Cage | Finish | Diffuser | Options |
|---------------|------------|-------|---------------|---------|-------------|----------|---|-----------------------|---|---|
| | | Watts | Source Lumens | Dimming | Energy Star | | | | | |
| | | | | | | 2 3000K | A | B1 Satin Black | WTA White Textured Acrylic | DIM LED dimming driver (0 - 10v) |
| | | | | | | 3 3500K | B | B2 Text Black | Optional Lens Material (see Price List) AHA Amber Honey Alabaster BAA Beige Alabaster OAA Opal Alabaster XA Custom Patterns | DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory TL Top Cover - (See Notes) |
| | | | | | 4 4000K | C | Z1 Satin Bronze | | | |
| 16-LED | O2A | 12 | 1600 | 0-10v | NO | D | Z3 Text Bronze | | | |
| 24-LED | O2C | 18 | 2420 | 0-10v | NO | X | W1 York White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder | | | |
| | | | | | | | | | | |



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 www.lightwayind.com • sales@lightwayind.com

