

MADW-LED

Construction:

- Steel housing and chassis
- White smooth acrylic lens standard, with optional lens material. Optional top lens.
- Louvered sides allow for side accent lighting.


Features:

- Low-Profile
- Slotted louvers for side accent lighting

Notes:

- Center lockup – hardware included
- Custom cage styles available
- UL and CUL listed **damp** location
 - Replaceable Module
 - CRI > 90
 - Dimming to 10%
 - Universal 120/277 volt standard

Type:	
Job Name:	

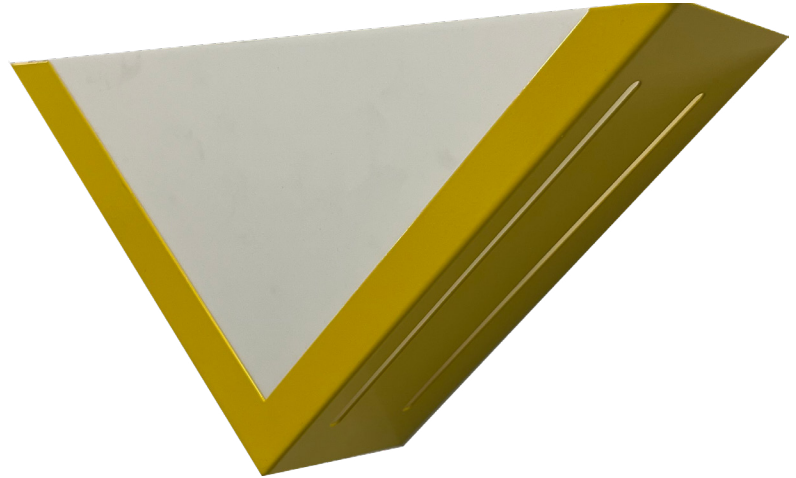

The low-profile wall sconce is ideally suited for corridor or accent lighting next to doorways or elevators. Optional lens material is sure to add a touch of style to any project.

Height - 7 ½"
Width - 15"
Depth - 4"



ORDERING INFORMATION

Example: MADW-7-LED-O2B-4-M20-RTA-DIM

MADW

Size	LED					Kelvin	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 York White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder M20 Tuscan Sun	WSA White Smooth Acrylic Optional Lens Material (see Price List) AHA Amber Honey Alabaster BAA Beige Alabaster OAA Opal Alabaster WLA White Linen Acrylic SLA Sable Linen Acrylic CTA Chocolate Linen Acrylic RTA Rapid textured Linen Acrylic BTA Black Textured Linen Acrylic WTA White Textured Linen Acrylic	DIM LED dimming driver (0 - 10v) TL Top Lens
7-LED	O2B	15	2000	0-10v	NO				



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com

