

LDLH-LED

Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.
- Canopy and housing are steel with a powder coated finish

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LDLH has a typical lead time of 6 weeks, consult factory for minimum order quantities and setup fees
- Optional battery backup - Requires 1 3/4" extension ring (18" & 23" only)
- UL and CUL listed **DAMP** location
- LED Array

- Replaceable Module
- CRI > 80
- Dimming (10% or 1%)
- Universal 120/277 volt standard
- 5-Year Warranty on LED Components

- For a ceiling flush mounted version see the **LDLC**


Type:	
Job Name:	





Shown with Black Textured Acrylic (BFA)




DIFFUSER OPTIONS

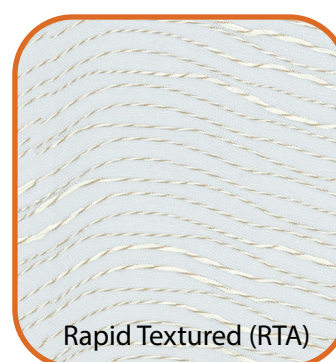


LDLH-LED

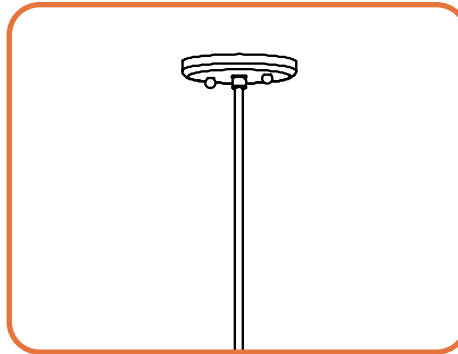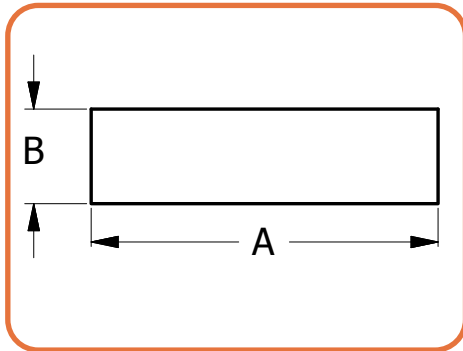


STEM OPTION -1S15

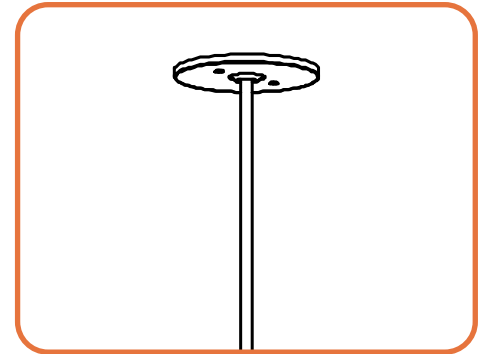

STEM OPTION -1SLM45

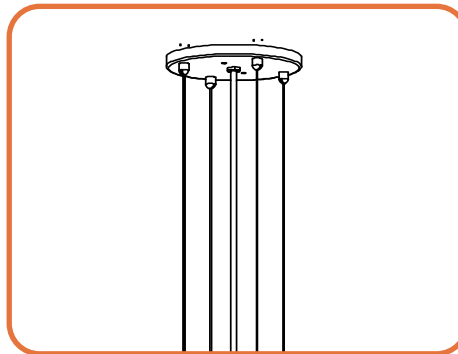

STEM OPTION -4AC-xSJ

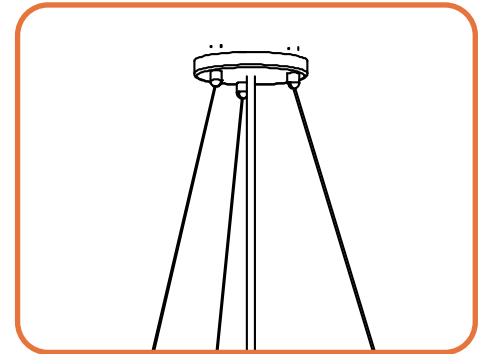

STEM OPTION -3AC-xSJ

	DIM 'A'	DIM 'B'	OAH
LDLH-16	16"	5.25"	12"
LDLH-18	18"	5.25"	12"
LDLH-23	23"	5.25"	15"
LDLH-30	30"	9"	24"

ORDERING INFORMATION

Example: LDLH-16-LED-F1P-4-W2-CTA-DIM-1SLM45-12OAH

LDLH

Size	LED					Kelvin	Cage	Finish	Diffusers	Options	
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K					
16-LED	F1L	9	1400	0-10v	YES	Optional 3 3500K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WLA White Linen Acrylic	(Suspension Systems) Please list Over All Height 1S15 -Single Stem 15 degree swivel 1SLM45 -Single Stem 45 degree swivel 4AC-(4) Aircraft Cable 3AC-(3) Aircraft Cable	
	F1O	10	863	TRIAC/ELV	YES			CTA Chocolate Textured Acrylic			
	F1P	15	1361	TRIAC/ELV	YES			Optional Trim Options (Consult Factory)			
18-LED	F1K	13	2115	0-10v	YES			RTA Rapid Textured Acrylic	Optional (See Price List) M17 Brass Powder	BTA Black Textured Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v ES Energy Star listed components T24 Title 24/JA8 Compliant (F10, F1P & F1Q configuration only)
	F1P	15	1361	TRIAC/ELV	YES			Bottom Diffuser			
	F1Q	23	2057	TRIAC/ELV	YES			WTA White Textured Acrylic		90CRI Consult Factory OCCHFA Concealed Occupancy Sensor See Sensor Resource Sheet	
	3E26		0	TRIAC/ELV	NO					Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes	
23-LED	L1A	36	4000	0-10v	NO						
	4E26		0	TRIAC/ELV	NO						
30-LED	O4C	36	4840	0-10v	NO						
	O8C	72	9680	0-10v	NO						
	O12C	107	14520	0-10v	NO						



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

