

# ORAW-LED

## Construction:

- Perforated aluminum shield; steel chassis
- Diffuser is white textured polycarbonate behind perforated shield


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Keyhole slots or center lockup for standard J-box
- Custom cage styles available
- Open top and bottom for up and down light
- ADA compliant
- Optional Battery Backup
- UL and CUL listed **DAMP** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

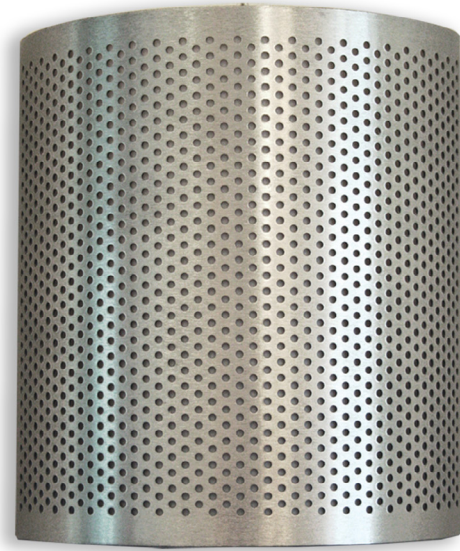

## ORAW-11-LED

Height - 11"  
Width - 10"  
Depth - 4"



## ORDERING INFORMATION

Example: **ORAW-11-LED-F1H-4-P2-POS**

**LXTW**

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		<b>P2</b> Brushed Alum <b>B1</b> Satin Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> Yolk <b>W2</b> Gloss White <b>W3</b> Text White <b>B2</b> Text Black <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter <b>W13</b> Pearl Beige	<b>POS</b> Perforated Aluminum Shield with White Textured Polycarbonate	<b>DIM</b> LED dimming driver (0 - 10v) <b>DIMLD</b> Line Voltage /TRIAC/ELV/120v See Resource Page  <b>ES</b> Energy Star listed components <b>90CRI</b> Consult Factory  Optional Voltage <b>-347V</b> Input voltage to 347v  <b>OCCHFB</b> Concealed Occupancy Sensor ( <i>O2A Configuration Only</i> ) See Sensor Resource Sheet  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
<b>11-LED</b>	<b>F1H</b>	9	1400	0-10v	YES	<b>Optional</b> 3 3500K	<b>Optional</b> (See Price List)	<b>P9</b> Brushed Nickel <b>M16</b> Antique Brass		
	<b>F10</b>	10	863	TRIAC/ELV	YES					
	<b>F1P</b>	15	1361	TRIAC/ELV	YES					
	<b>O2A</b>	12	1600	0-10v	NO					
	<b>F1J</b>	20	2820	0-10v	YES					



28435 Industry Drive., Valencia, California 91355  
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
East Coast Sales: 866-350-0991 • fax 866-490-5754  
www.lightwayind.com • sales@lightwayind.com



Revision: 05/19/2021