

LCWH-LED

Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.
- 5/8" sq Oak stained accent trim

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LCWH has a typical leadtime of 6 weeks, consult with factory for any minimum order quantities and setup fees
- UL and CUL listed **DAMP** location
- LED Array
 - Replaceable Module
 - CRI > 90
 - Dimming (10% or 1%)
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	





Shown with White Linen Acrylic Side Lens



- Ceiling mounted version available, See **LCWC**




DIFFUSER OPTIONS

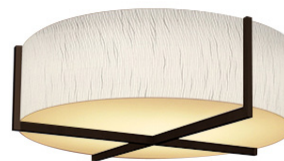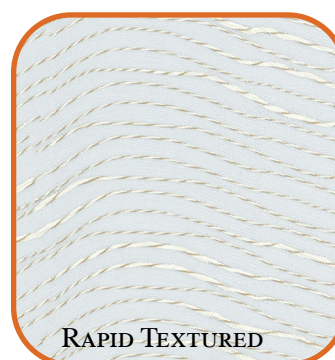


LCWH-LED

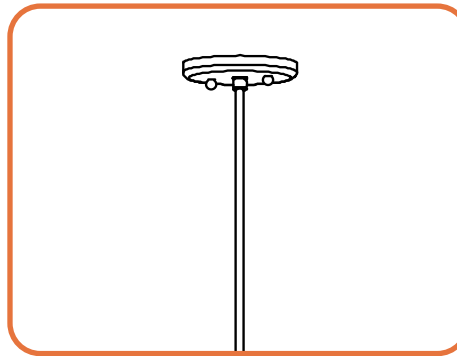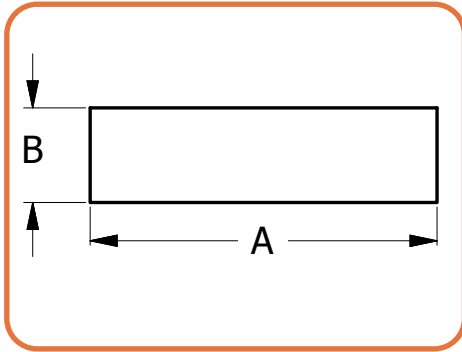


STEM OPTION -1S15

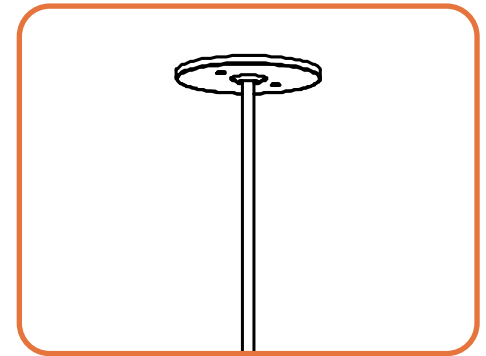

STEM OPTION -1SLM45

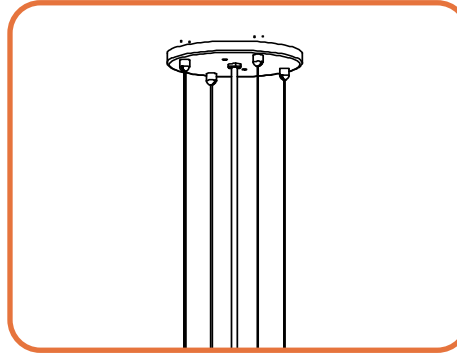

STEM OPTION -AIRCRAFT CABLE WITH CORD-(4AC-xSJ)

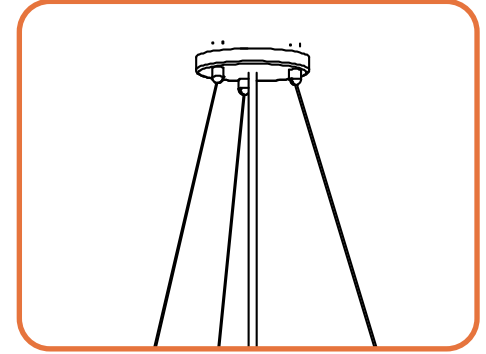



STEM OPTION -AIRCRAFT CABLE WITH CORD-(3AC-xSJ)

	DIM 'A'	DIM 'B'	OAH
LCWH-16	16"	4.5"	12"
LCWH-20	20"	5.25"	12"
LCWH-25	25"	8"	15"
LCWH-31	31"	8"	24"

ORDERING INFORMATION

Example: LCWH-16-LED-F1Q-4-W2-S02-WLA-WTA-DIM-4AC-12"OAH

LCWH

Size	LED					Kelvin	Cage	Finish	Diffusers	Options
		Watts	Source Lumens	Dimming	Energy Star					
16-LED	F1K	13	2115	0-10v	YES	2 3000K 3 3500K 4 4000K		STEM/CANOPY B1 Satin Black M13 Anod Silver T6 Pewter W2 Gloss White Z1 Satin Bronze Z3 Text Bronze WOODS S01 Light Stain 	WLA White Linen Acrylic CTA Chocolate Textured Acrylic Optional Trim Options (Consult Factory)	(Suspension Systems) Please list Over All Height 1S15 -Single Stem 15 degree swivel 1SLM45 -Single Stem 45 degree swivel 4AC-(4) Aircraft Cable 3AC -(3) Aircraft Cable
	F1P	15	1361	TRIAC/ELV	YES					
	F1Q	23	2057	TRIAC/ELV	YES					
	2E26		0	TRIAC/ELV	NO					
20-LED	L1A	36	4000	0-10v	NO			S02 Dark Stain 	RTA Rapid Textured Acrylic BTA Black Textured Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v ES Energy Star listed components T24 Title 24/JA8 Compliant (F10, F1P & F1Q configuration only)
	2E26		0	TRIAC/ELV	NO					
25-LED	L1A	36	4000	0-10v	NO					
31-LED	O4C	36	4840	0-10v	NO					
	O8C	72	9680	0-10v	NO					
	O12C	107	14520	0-10v	NO					
	8E26		0	TRIAC/ELV	NO					
									Bottom Diffuser WTA White Textured Acrylic	OCCHFA Concealed Occupancy Sensor See <i>Sensor Resource Sheet</i> Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
www.lightwayind.com • sales@lightwayind.com

