

SDLH-LED

Construction:

- Steel housing and chassis
- White smooth acrylic lens
- Field adjustable aircraft cable

Light Source:

- LED
- Dimming to 10% **Included**


Notes:

- Mounts to standard junction box
- UL and CUL listed **DAMP** location
- Optional battery backup
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	



	SDLH-24	SDLH-36	SDLH-48
A	24"	36"	48"
B	5 1/2"	5 1/2"	5 1/2"
C	9 3/4"	9 3/4"	9 3/4"
D	12"	24"	35"
OAH	4 - 24"	4 - 24"	4 - 24"

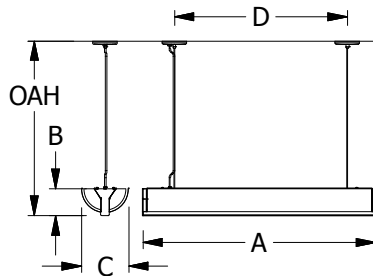

ORDERING INFORMATION

Example: **SDLH-24-LED-O2C-4-B1-WSA-2AC-BSJ-OAH24**

SDLH

Size	LED	Watts	Source Lumens	Dimming	Energy Star	Kelvin	Cage	Finish	Diffuser	Options
24-LED	O1A	6	800	0-10v	NO	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic	(Suspension Systems) Please list Over All Height 2AC__ - Aircraft Cable w/ WSJ - White "SJ" Cord BSJ - Black "SJ" Cord GSJ - Gray "SJ" Cord DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory 90CRI Consult Factory Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
	O2C	18	2420	0-10v	NO			Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum P9 Brushed Nickel		
	O4C	36	4840	0-10v	NO					
36-LED	O3C	27	3630	0-10v	NO					
	O6C	54	7260	0-10v	NO					
48-LED	O1G	20	2200	0-10v	NO					
	O4C	36	4840	0-10v	NO					
	O8C	72	9680	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

