

TUSW-LED

Construction:

- Steel housing and chassis
- Clear Smooth Acrylic Lens
- Optional White Frosted Acrylic Lens



Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate
- Optional Photocell - (21)
- Optional battery backup
- Dark Sky compliant
- UL and CUL listed **WET** location
- BUG Rating: B1-U0-G0
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

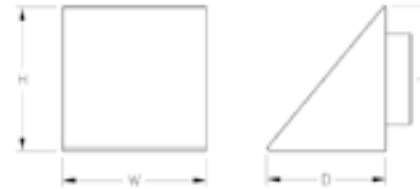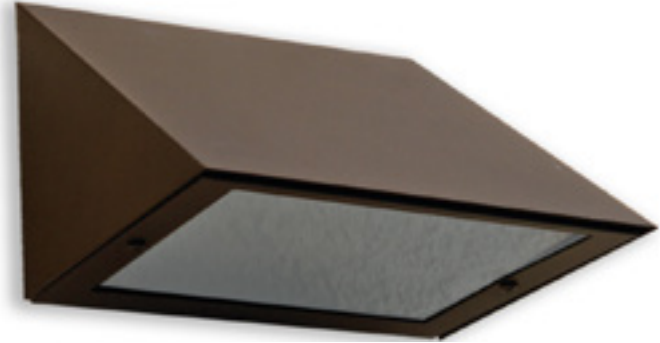

TUSW-8

Height - 7"
Width - 8 1/4"
Depth - 8 3/8"

TUSW-10

Height - 8 3/4"
Width - 10 1/4"
Depth - 10 1/4"

TUSW-12

Height - 10 1/2"
Width - 12 1/4"
Depth - 12"



ORDERING INFORMATION

Example: TUSW-12-LED-O2B-4-Z3-WFA

TUSW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options				
		Watts	Source Lumens	Dimming	Energy Star									
8-LED	O1A	6	800	0-10v	NO	1 2700K 2 3000K 3 3500K 4 4000K 5 5000K		B1 Satin Black	CSA Clear Smooth Acrylic WFA White Frosted Acrylic	DIM LED dimming driver (0 - 10v) 42 All Aluminum Construction 21 Photocell -01 120 volt -02 277 volt OCCHFA Concealed Occupancy Sensor Battery Backup Options (Available with 0-10v only) (Excludes TUSW-8) BB10 10 Watts (1170lm) for 90-Minutes				
	O2A	12	1600	0-10v	NO			B2 Text Black						
10-LED	O1A	6	800	0-10v	NO			Z1 Satin Bronze						
	O2A	12	1600	0-10v	NO			Z3 Text Bronze						
	O3A	18	2400	0-10v	NO			W1 Yolk White						
12-LED	O1B	8	1000	0-10v	NO			W2 Gloss White						
	O2B	15	2000	0-10v	NO			T4 Shimmer Gray						
	O3B	22	3000	0-10v	NO			M13 Anod Silver						
	O4B	29	4000	0-10v	NO			T6 Pewter						
								Optional (See Price List)			W13 Pearl Beige			
											M17 Brass Powder			
											P2 Brushed Alum			



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

