

# MEDW-600-LED

## Construction:

- Steel housing and chassis
- 3/8" Sq Accent bars and rings are extruded aluminum


## Light Source:

- LED
- Dimming to 10% **Included**


## Notes:

- Keyhole slots top and bottom
- Solid front shield allowing no forward light
- Down light only complies with Dark Sky requirements
- Optional photocell (21) increases fixture depth 1 1/2"
- Optional battery backup increases fixture depth 1 1/2"
- BUG Rating: B10U0G0
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components


Type:	
Job Name:	



## DESIGN OPTIONS (Choose your cage design)

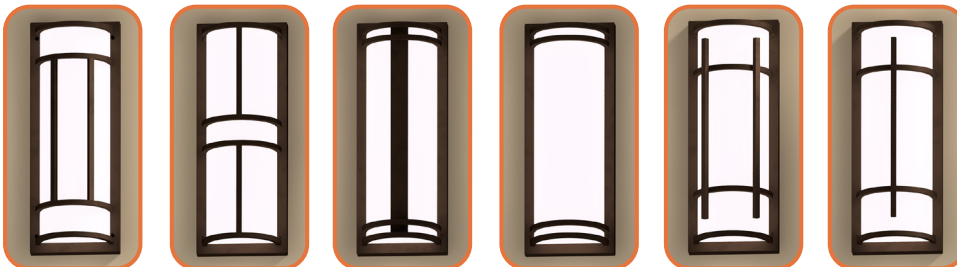

MERW-A    MERW-B    MERW-C<sup>D1</sup>    MERW-D    MERW-E    MERW-F<sup>D1</sup>

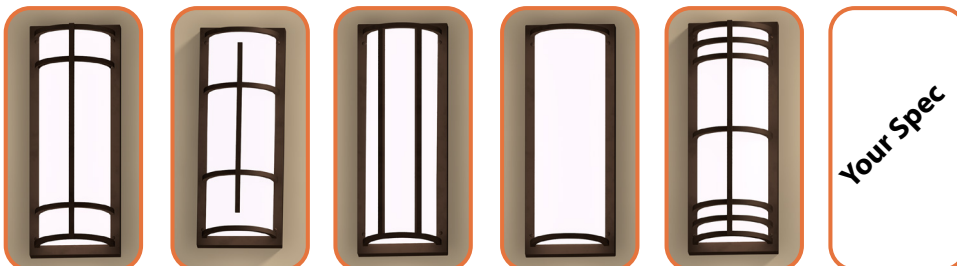


MERW-G<sup>D1</sup>    MERW-H<sup>D1</sup>    MERW-I    MERW-J    MERW-K<sup>D1</sup>    MERW-X

<sup>(1)</sup> Contact factory for assistance

### Fixture Overall Dimensions

- "H" - 12" - 16" - 18" - 26" - 38" - 50"
  - "W" - 6 1/2"
  - "D" - 4"
  - "D1" - 4 3/8"
  - "MC" - 6" - 8" - 9" - 13" - 19" - 25"
- See 900 or 1100 Series for other width options



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com



## ORDERING INFORMATION

Example: MEDW-626-LED-G-F2B-4-B1

### MEDW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K	A B D E F G H I J K X	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White W3 Text White T4 Shimmer Gray M13 Anod Silver T6 Pewter	<b>Optional Cage Accents</b> (See Page 2)  <b>Material</b> F Filigree P Perforated Screen M Wire Mesh W Waffle Pattern  <b>Style</b> SC Screen Complete CC Center Complete EC Ends Complete CH Center Half OX Custom	<b>DIM</b> LED dimming driver (0 - 10v)  <b>Z1</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt  <b>OCCHFB</b> Concealed Occupancy Sensor <i>See Sensor Resource Sheet</i> (0-10v Driver Engine only)  <b>90CRI</b> Consult Factory  Optional Voltage <b>-347V</b> Input voltage to 347v  <b>Battery Backup Options</b> (0-10v Driver Engine only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
612-LED	F2B	12	1180	0-10v	NO	<b>Optional</b> 3 3500K				
616-LED	F2B	12	1180	0-10v	NO					
618-LED	F2B	12	1180	0-10v	NO					
626-LED	F2B	12	1180	0-10v	NO					
638-LED	F2B	12	1180	0-10v	NO					
650-LED	F2B	12	1180	0-10v	NO					

