Lightway

BUCW-LED

A halo of light for exterior architecture

A circular LED wall sconce that casts a soft halo across facades and entryways.

WET-LOCATION LED WALL SCONCE



APPLICATION Riverstone Community Center at night

Ideally Suited For

Community & Recreation
Entrances and gathering areas

Worship Facilities
Entries and fellowship halls

Hotels & Hospitality
Guest arrivals and walkways

Civic & Municipal
Libraries and public buildings

Retail & Mixed-Use
Storefronts and plazas

Multifamily Residential
Lobbies and shared amenities

Education
Campus entries and student centers

Healthcare
Clinic entries and covered walks

BUCW-LED

Architectural LED wall sconce

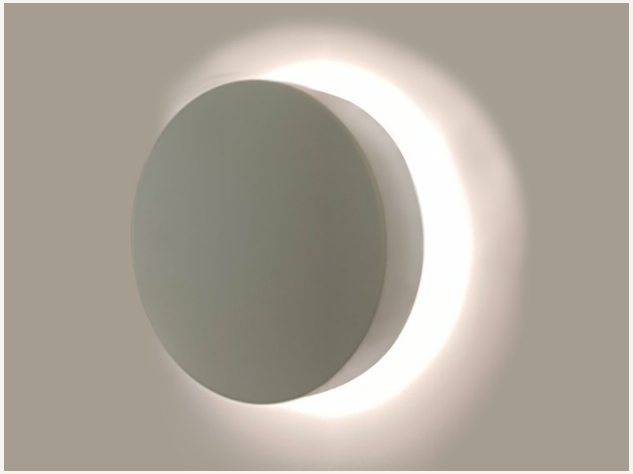

DESIGN & INSTALLATION

Powder-coated spun steel cover.
Universal mounting plate and replaceable LED module.

LIGHTWAY FINISH PALETTE



Confirm palette availability for BUCW-LED with Lightway.

SPECIFICATIONS

Dimensions	10" diameter × 3" depth
LED configuration	F1O / 10 W
Light output	863 source lumens
Input voltage	120/277 V universal, standard
Dimming	TRIAC/ELV down to 10%
Color temperature	2700 K / 3000 K / 3500 K / 4000 K
Color rendering	CRI >90
Warranty	5 years on LED components

BUCW-LED FINISH OPTIONS

Standard

B1	Satin Black	**B2**	Textured Black	**Z1**	Satin Bronze
Z3	Textured Bronze	**W1**	Yolk White	**W2**	Gloss White
T4	Shimmer Gray	**M13**	Anod Silver	**T6**	Pewter
W13	Pearl Beige				

Optional **M17** Brass Powder **P9** Brushed Nickel

LISTINGS & COMPLIANCE

UL and cUL listed for wet locations
ADA compliant / ENERGY STAR listed
Build America, Buy America Act compliant

BABA

Consult factory

LED components

Specifications from the Lightway BUCW-LED ordering sheet, rev. 02/07/2025.

LIGHTWAY INDUSTRIES

28435 Industry Drive, Valencia, CA 91355

WEST COAST SALES

800-325-4448 / 661-257-0286

EMAIL & WEB

sales@lightwayind.com lightwayind.com