

MNBW-LED

Construction:

- Steel housing and chassis
- Lens is white textured or smooth polycarbonate


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Center lockup – hardware include (14")
- Bi-directional keyhole slots left and right (16")
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

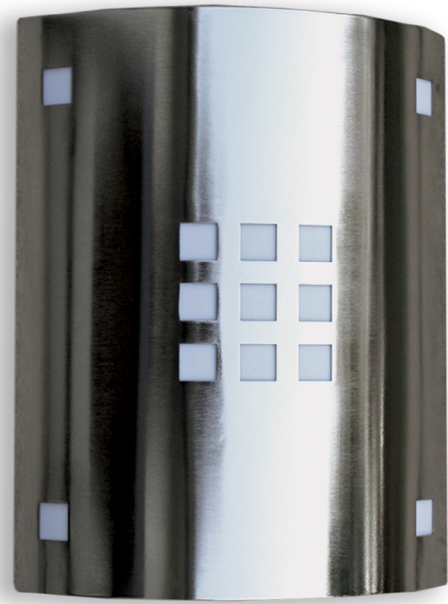

MNBW-14	MNBW-16
Height - 14"	Height - 16"
Width - 14 1/4"	Width - 13 1/2"
Depth - 6 1/4"	Depth - 6 1/4"



ORDERING INFORMATION

Example: MNBW-16-LED-O2A-4-P2-WTP

MNBW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
14-LED	F1O	10	863	TRIAC/ELV	YES	2 3000K 3 3500K 4 4000K		B1 Satin Black	WTP White Textured Polycarbonate WSP White Smooth Polycarbonate Optional Lens Material (See Price List) BSA Blue Smooth Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page ES Energy Star listed components
	F1D	12	1230	0-10v	NO			Z1 Satin Bronze		
	F2D	24	2460	0-10v	NO			Z3 Text Bronze		
16-LED	O1A	6	800	0-10v	NO			W1 Yolk White		
	O2A	12	1600	0-10v	NO			W2 Gloss White		
								T4 Shimmer Gray		
								M13 Anod Silver		
								T6 Pewter		
								W13 Pearl Beige		
								Optional (See Price List)		
								M17 Brass Powder		
								M16 Antique Brass		
								P2 Brushed Alum		
								P9 Brushed Nickel		



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

