

TBLW-LED

Construction:

- Steel housing and chassis
- Bottom lens is clear smooth or white frosted acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate
- Optional all aluminum construction painted finish only
- Optional photocell - specify voltage 120v or 277v
- Optional knockouts centered on all four sides / increases fixture depth by 1/2"
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

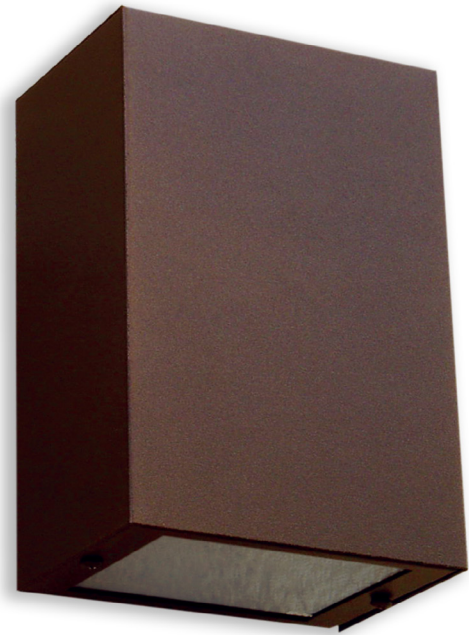

TBLW-13-LED

Height - 13 3/4"

Width - 7 3/4"

Depth - 7 1/4"



ORDERING INFORMATION

Example: TBLW-13-LED-F2D-4-Z3-CSA

TBLW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder P2 Brushed Alum	CSA Clear Smooth Acrylic WFA White Forsted Acrylic	DIM LED dimming driver (0 - 10v) 39 Knockouts located 4 sides 42 All Aluminum Construction 21 Photocell - See Notes -01 120 volt -02 277 volt Battery Back Options BB10 10 Watts for 90-Minutes
13-LED	F2D	24	2460	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 www.lightwayind.com • sales@lightwayind.com

