DSYV-LED

Type:	
Job Name:	

Construction:
- Steel chassis and end caps
- Diffuser is white smooth polycarbonate

Light Source:
- LED
- Dimming to 10% **Included**

Notes:
- Mounts to standard J-Box with slotted anchor holes
- Optional battery backup (36" or 48" only)
- Vertical or Horizontal mounting
- ADA compliant
- UL and CUL listed **DAMP** location
- Optional UL and CUL listed **WET** Available
- LED Components
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - L70: >60,000Hrs
  - 5-Year Warranty on LED Components

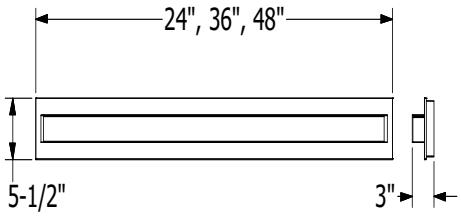

DIMMABLE

c UL us LISTED

MADE IN AMERICA

ORDERING INFORMATION

Example: DSYV-36-LED-O3C-2-W1-WSA

DSYV								

Size	LED	Watts	Source Lumens	Dimming	Energy Star
24-LED	O2C	18	2420	0-10v	NO
36-LED	O3C	27	3630	0-10v	NO
48-LED	O4C	36	4840	0-10v	NO

Kelvin	Cage	Finish	Diffuser	Options
2 3000K **3** 3500K **4** 4000K		**B1** Satin Black **B2** Text Black **Z1** Satin Bronze **Z3** Text Bronze **W1** Yolk White **W2** Gloss White **W3** Text White **T4** Shimmer Gray **M13** Anod Silver **T6** Pewter **W13** Pearl Beige **Optional** (See Price List) **M17** Brass Powder	**WSP** White Smooth Polycarbante	**DIM** LED dimming driver (0 - 10v) **DIMLD** Line Voltage /TRIAC/ELV/120v See Resource Page **WET** Wet listed version **OCCHFA** Concealed Occupancy Sensor *See Sensor Resource Sheet* Optional Voltage **-347V** Input voltage to 347v **Battery Backup Options** *(Available with 0-10v only)* **BB10** 10 Watts (1170lm) for 90-Minute

28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286• fax 800-323-2346 /661-257-0201
www.lightwayind.com • sales@lightwayind.com

Lightway

Revision: 10/05/2023