

XLSW-LED

Construction:

- Aluminum chassis with laser cut housing
- Diffuser is .060" thick white smooth or textured polycarbonate or optional amber, beige or opal alabaster acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Center lockup - hardware included
- Custom cage styles available
- ADA compliant
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Dimming (10% or 1%)
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

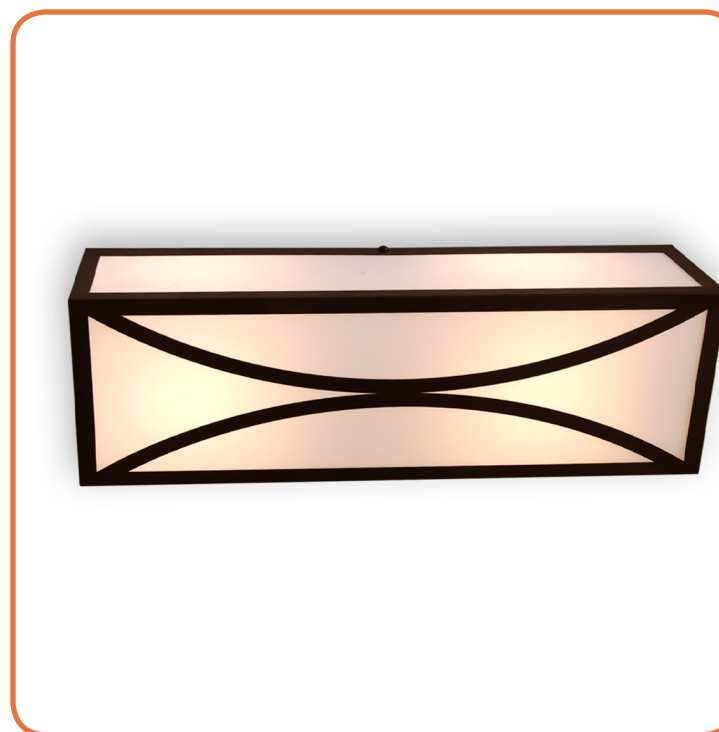

WALL
CEILING
PENDANT
OUTDOOR

XLSW-18-LED

Height - 18"
Width - 6 1/2"
Depth - 4"

ORDERING INFORMATION

Example: XLSW-18-LED-O2C-4-Z3-WSP

XLSW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSP White Smooth Polycarbonate WTP White Textured Polycarbonate Optional Lens Material (see Price List) AHA Amber Honey Alabaster BAA Beige Alabaster OAA Opal Alabaster	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) 90CRI Consult Factory
18-LED	O2C	18	2420	0-10v	NO	Optional 3 3500K	M17 Brass Powder M16 Antique Brass P9 Brushed Nickel			



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

