

BDFV-LED

Construction:

- Brushed aluminum cover; aluminum chassis
- Diffuser is .10" thick extruded white acrylic
- Accent bars and rings are extruded aluminum

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Mounts over standard J-Box
- Optional battery backup
- Vertical or Horizontal mounting
- ADA compliant (Cage style F & G non ADA)
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	



Height - 12 1/4" - 16 1/4" - 24 1/4" - 36 1/4" - 48 1/4" - 72 1/4" - 96 1/4"

Width - 5 7/8"

Depth - 4"



ORDERING INFORMATION

Example: BDFV-36-LED-O3C-4-A-PO-WSA-DIM

BDFV

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K	A B C D E F G X	P2 Brushed Alum Optional (see Price List) W2 Gloss White B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory ES Energy Star listed components T24 Title 24/JA8 Compliant (F1Y configuration only)
12-LED	O1C	9	1210	0-10v	NO					
16-LED	O2A	12	1600	0-10v	NO					
24-LED	O2C	18	2420	0-10v	NO					
	F1Y	30	3235	TRIAC/ELV	YES					
36-LED	O3C	27	3630	0-10v	NO					
48-LED	O4C	36	4840	0-10v	NO					
72-LED	O6C	54	7260	0-10v	NO					
96-LED	O8C	72	9680	0-10v	NO					
<p>Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minute</p>										



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 www.lightwayind.com • sales@lightwayind.com




Cage Styles



Cage A



Cage B

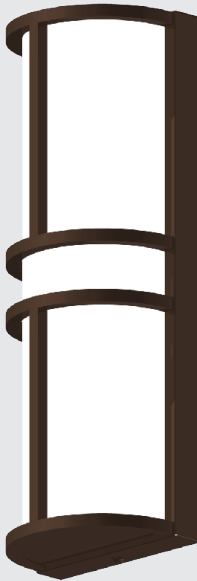

Cage C




Cage D



Cage E



Cage F

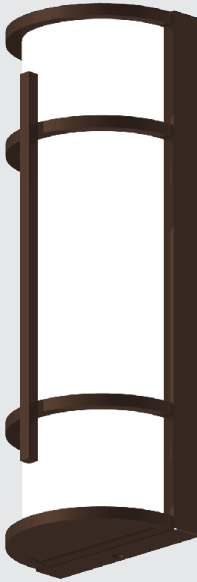

Cage G

NON ADA
DEPTH 4 1/4"



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

