

JPEW-LED

Construction:

- Steel Housing
- Diffuser is white textured polycarbonate


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate for standard "J-Box"
- Mounting orientation is downward
- Optional photocell attaches to wall mounting bracket, specify 120v or 277v
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

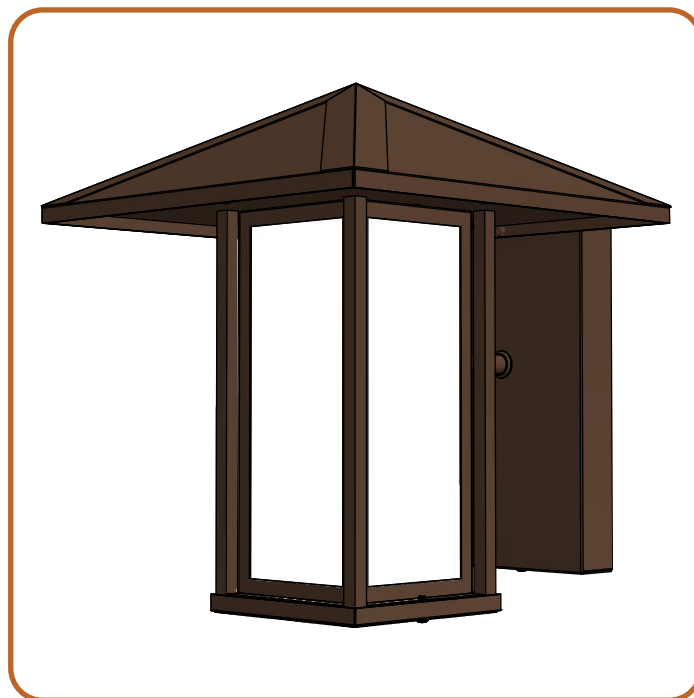

JPEW-13

Height - 13"
Width - 11"
Depth - 12.2"



ORDERING INFORMATION

Example: JPEW-LED-13-01J-4-Z3-WTP

JPEW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WTP White Textured Polycarbonate	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) 90CRI Consult Factory Z1 Photocell - <i>See Notes</i> -01 120 volt -02 277 volt Optional Voltage -347V Input voltage to 347v
13-LED	F2B	12	1180	0-10v	NO	Optional 3 3500K		Optional (See Price List) M17 Brass Powder M16 Antique Brass		



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

