

# MENW-900-LED

## Construction:

- Steel housing and chassis
- Diffuser UV-stabilized, high impact resistant, 100% DR acrylic


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Integral mounting plate; keyhole slots
- Top and bottom white acrylic lens - standard
- Optional photocell (21) increases fixture depth 1 1/2"
- Optional battery backup
- Optional lens cover (NCL) prevents up/down light
- UL and CUL listed **WET** location
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components
- You may also like the [MANW](#) or [MERW](#) Series

Type:	
Job Name:	

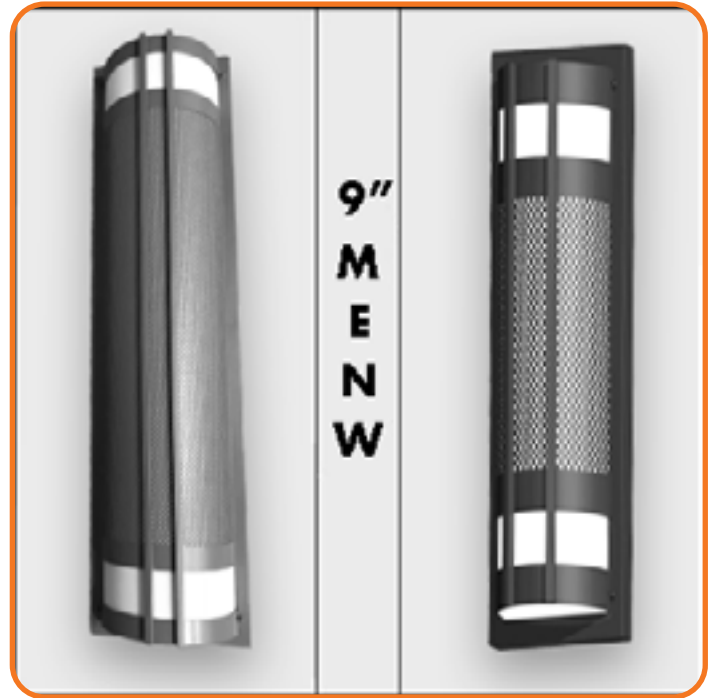

## DESIGN OPTIONS



**MENW-A**



**MENW-B**



**MENW-C**



**MENW-D**



**MENW-E**



**MENW-F**

### Fixture Overall Dimensions



Height - 14" - 16" - 20" - 26" - 38" - 50"

Width - 9"

Depth - 5 1/4"

"MC" - 7" - 8" - 10" - 13" - 19" - 25"

- See 600 or 1100 Series for other width options



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
[www.lightwayind.com](http://www.lightwayind.com) • [sales@lightwayind.com](mailto:sales@lightwayind.com)



# MENW-900-LED

## ORDERING INFORMATION

Example: MENW-916-LED-O2C-4-D-Z1-WSA

MENW

Size	LED	Watts	Source Lumens	Dimming	Energy Star	Kelvin	Cage	Finish	Diffuser	Options
914-LED	O1C	9	1210	0-10v	NO	2 3000K 3 3500K 4 4000K	A	B1 Satin Black	WSA White Smooth Acrylic	<b>DIM</b> LED dimming driver (0 - 10v) <b>DIMLD</b> Line Voltage /TRIAC/ELV/120v Consult Factory  <b>Z1</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt <b>NCL</b> Aluminum Lens Cover - <i>See Notes</i>  <b>ES</b> Energy Star listed components <b>T24</b> Title 24/JA8 Compliant (F1Y configuration only)  <b>39</b> J-Box with knockouts on all sides  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
	F1H	9	1400	0-10v	YES		B	B2 Text Black		
	O2C	18	2420	0-10v	NO		D	Z1 Satin Bronze		
916-LED	O2C	18	2420	0-10v	NO	X	C	Z3 Text Bronze	WSA White Smooth Acrylic	<b>Z1</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt <b>NCL</b> Aluminum Lens Cover - <i>See Notes</i>  <b>ES</b> Energy Star listed components <b>T24</b> Title 24/JA8 Compliant (F1Y configuration only)  <b>39</b> J-Box with knockouts on all sides  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
920-LED	O2C	18	2420	0-10v	NO		E	W1 Yolk White		
	O4A	24	3200	0-10v	NO		F	W2 Gloss White		
926-LED	O2C	18	2420	0-10v	NO	X	W3 Text White	WSA White Smooth Acrylic	<b>Z1</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt <b>NCL</b> Aluminum Lens Cover - <i>See Notes</i>  <b>ES</b> Energy Star listed components <b>T24</b> Title 24/JA8 Compliant (F1Y configuration only)  <b>39</b> J-Box with knockouts on all sides  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes	
	O4C	36	4840	0-10v	NO		T4 Shimmer Gray			
	F1Y	30	3235	TRIAC/ELV	YES		M13 Anod Silver			
938-LED	O3C	27	3630	0-10v	NO	X	T6 Pewter	WSA White Smooth Acrylic	<b>Z1</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt <b>NCL</b> Aluminum Lens Cover - <i>See Notes</i>  <b>ES</b> Energy Star listed components <b>T24</b> Title 24/JA8 Compliant (F1Y configuration only)  <b>39</b> J-Box with knockouts on all sides  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes	
950-LED	O4C29	29	3412	0-10v	NO		W13 Pearl Beige			
	O4C	36	4840	0-10v	NO		<b>Optional</b> (See Price List) <b>M17</b> Brass Powder <b>P2</b> Brushed Alum <b>P9</b> Brushed Nickel <b>M16</b> Antique Brass			



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com



Revision: 12/08/2022