

PDSW-LED

Construction:

- Aluminum housing and chassis


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**
- Optional 8-watt amber LED

Notes:

- Center lockup – hardware include
- Optional J-Box with knockouts for surface conduit (39)
- Dark sky compliant
- ADA Compliant, Except PDSW-18
- Optional Battery Backup increases depth to 4"
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - Optional Amber LED Module (585-595lm)
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

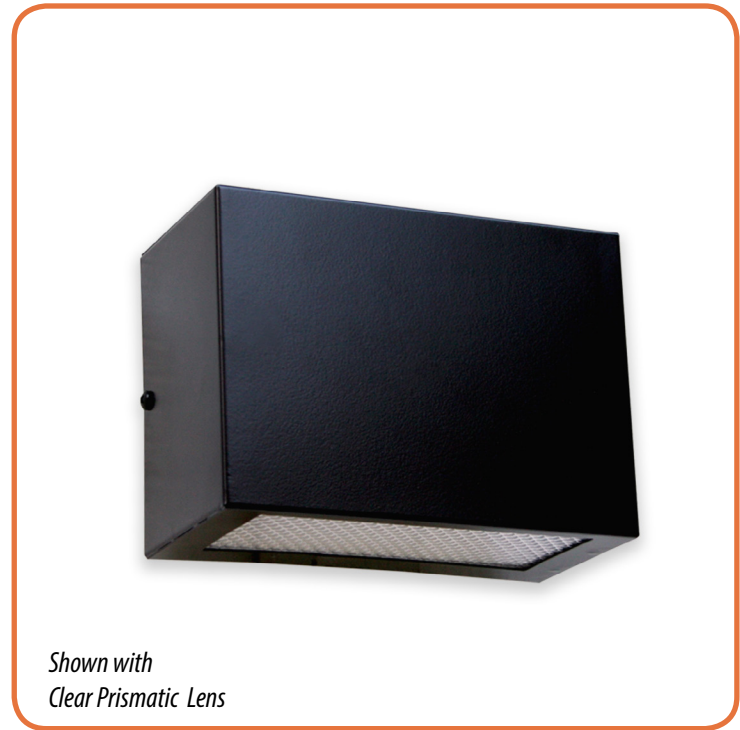

Shown with
Clear Prismatic Lens



Shown with
Optional Amber arrays

PDSW-5-LED

Height - 5 1/8"
Width - 7 1/8"
Depth - 3 1/2"

PDSW-12-LED

Height - 5 1/8"
Width - 12"
Depth - 3 1/2"



ORDERING INFORMATION

Example: PDSW-5-LED-U-8W-4-B1-CPA

Model	Cage	Voltage	Lamping	Kelvin	Finish	Diffuser	Options
PDSW-5-LED		U 120 - 277	8w LED / 1050lm AMR-8w LED / 357lm	2 3000K 4 4000K	B1 Satin Black W2 Gloss White Z1 Satin Bronze Z3 Text Bronze	CSA Clear Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
PDSW-12-LED			11w LED / 1225lm 20w LED / 2100lm* AMR-8w LED / 357lm	Optional 3 3500K	Optional (See Price List) M2 Copper Metallic W1 Yolk W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige P2 Brushed Alum P9 Brushed Nickel M16 Antique Brass	Optional Lens Material (See Price List) CPA Clear Prismatic Acrylic WTA White Textured Acrylic	DIMLD LED Phase dimming driver (120 Volt Only) 39 J-Box with Knockouts (increases depth by 1 1/4") UP/DN Damp listing only (Up/Down Light) Battery Backup Options (Increases fixture depth to 4") BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
East Coast Sales: 866-350-0991 • fax 866-490-5754
www.lightwayind.com • sales@lightwayind.com

