

MDAW-6xx-LED

Construction:

- Steel chassis and cage
- Diffuser is impact resistant extruded white acrylic



Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots
- Top and bottom white acrylic lens - standard
- Optional photocell (21) increases fixture depth 3/4"
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

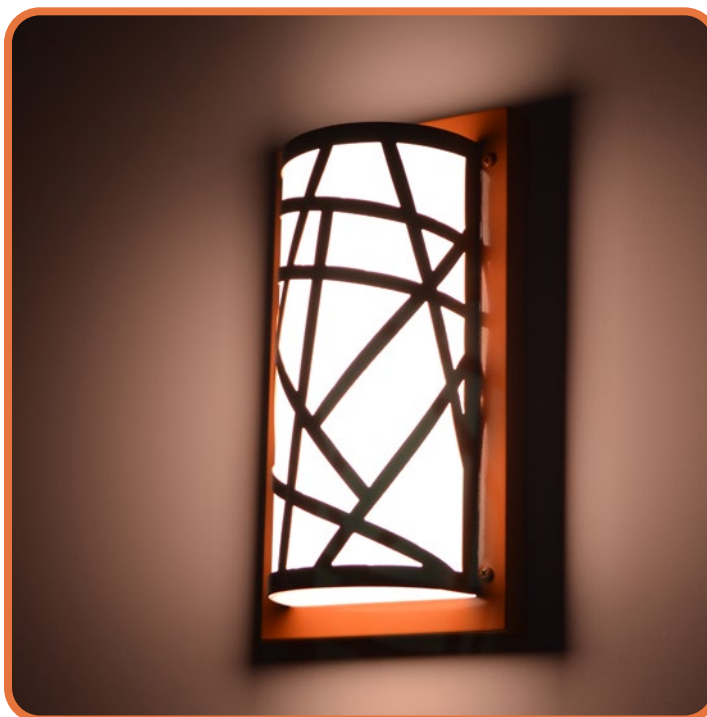

	DIM 'A'	M.C.
MDAW-612	12"	6"
MDAW-616	16"	8"
MDAW-626	26"	13"
MDAW-638	38"	19"
MDAW-650	50"	25"



ORDERING INFORMATION

Example: MDAW-726-LED-O2C-4-Z3-WSA

MDAW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
612-LED	O1C	9	1210	0-10v	NO	2 3000K 3 3500K 4 4000K 5 5000K	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum P9 Brushed Nickel	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page 90CRI Consult Factory 21 Photocell - <i>See Notes</i> -01 120 volt -02 277 volt Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes	
616-LED	O1C	9	1210	0-10v	NO					
626-LED	O2C	18	2420	0-10v	NO					
638-LED	O3C	27	3630	0-10v	NO					
650-LED	O4C	36	4840	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 800-325-4448 /661-257-0286
 www.lightwayind.com • sales@lightwayind.com



Revision: 11/09/2023