

# MRDW-LED

## Construction:

- Steel housing and chassis
- Solid shield stands off of wall providing wall wash on all sides

## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Bi-directional keyhole slots
- Optional custom shields
- Optional photocell (-21)
- Optional battery backup (-BB10)
- Optional Aluminum construction (-42)
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components


### MRDW-15

Height - 15"  
Width - 9"  
Depth - 6 1/2"

### MRDW-24

Height - 24"  
Width - 9"  
Depth - 7"

Type:	
Job Name:	

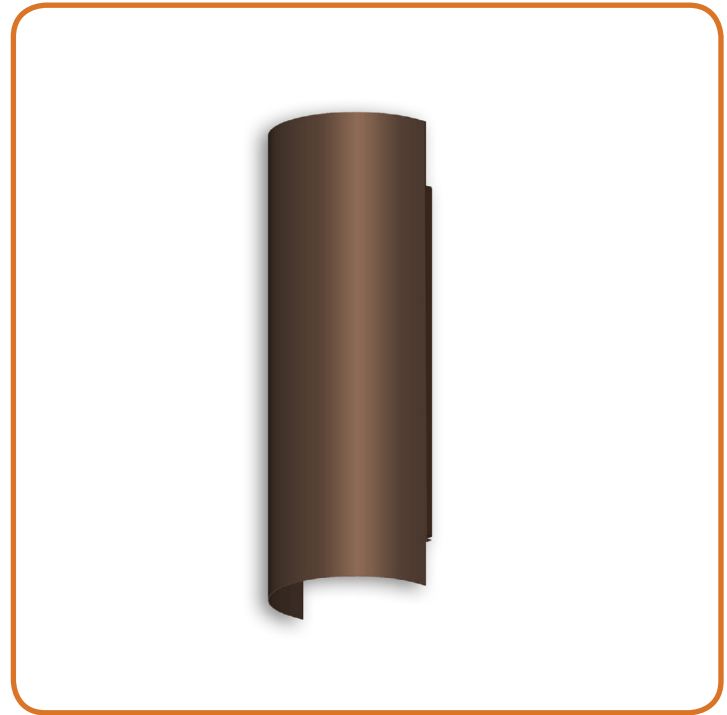

## ORDERING INFORMATION

Example: MRDW-15-LED-O2A-4-Z3-NA-42

### MRDW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		<b>B1</b> Satin Black <b>B2</b> Text Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> York White <b>W2</b> Gloss White <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter	N/A Solid Shield	<b>DIM</b> LED dimming driver (0 - 10v) <b>DIMLD</b> Line Voltage /TRIAC/ELV/120v See Resource Page  <b>42</b> All Aluminum Construction  <b>90CRI</b> Consult Factory  <b>21</b> Photocell - See Notes -01 120 volt -02 277 volt
15-LED	O1A	6	800	0-10v	NO	Optional 3 3500K	Optional (See Price List) <b>M17</b> Brass Powder <b>P2</b> Brushed Alum <b>P9</b> Brushed Nickel <b>M16</b> Antique Brass			<b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
	O2A	12	1600	0-10v	NO					
24-LED	O2A	12	1600	0-10v	NO					
	F2E	29	4694	DIM or DIMLD	NO					



28435 Industry Drive., Valencia, California 91355  
West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
East Coast Sales: 866-350-0991 • fax 866-490-5754  
www.lightwayind.com • sales@lightwayind.com

