

BVWW-LED

Construction:

- Steel housing and chassis
- Clear Smooth Acrylic Lens
- Optional White Frosted Acrylic Lens


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots left and right
- Optional aluminum construction (painted finish only)
- Optional battery backup
- Dark Sky compliant
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

| | |
|-----------|--|
| Type: | |
| Job Name: | |

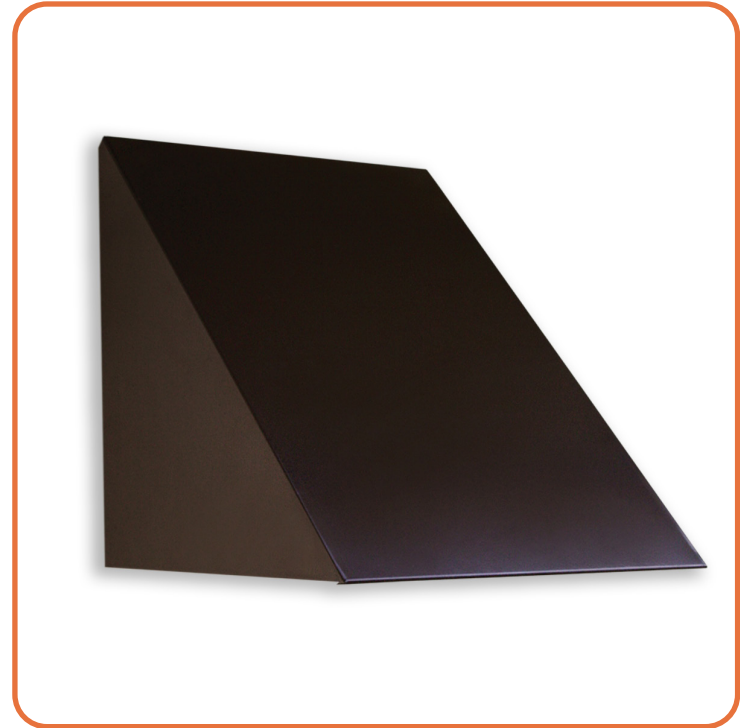

BVWW-13

Height - 13 1/2"

Width - 12"

Depth - 13 3/4"



ORDERING INFORMATION

Example: BVWW-13-LED-O4B-4-Z3-WSA

BVWW

| Size | LED | | | | | Kelvin | Cage | Finish | Diffuser | Options |
|--------|-----|-------|---------------|---------|-------------|---|------|--|--|--|
| | | Watts | Source Lumens | Dimming | Energy Star | | | | | |
| 13-LED | O2B | 15 | 2000 | 0-10v | NO | 1 2700K 2 3000K 3 3500K 4 4000K 5 5000K | | B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder P2 Brushed Alum | CSA Clear Smooth Acrylic WSA White Smooth Acrylic | DIM LED dimming driver (0 - 10v) 42 All Aluminum Construction 21 Photocell - See Notes -01 120 volt -02 277 volt OCCHFA Concealed Occupancy Sensor Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes |
| | O4B | 29 | 4000 | 0-10v | NO | | | | | |



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com



Revision: 01/18/2023