

# LCLC-LED

## Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.

## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LCLC has a typical lead time of 6 weeks, consult with factory for any minimum order quantities and setup fees
- Finish options applies only with optional battery backup extension ring
- UL and CUL listed **DAMP** location
- LED Array
  - Replaceable Module
  - CRI > 90
  - Dimming (10% or 1%)
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components
- For a pendant mounted version see the **LCLH**

Type:	
Job Name:	



SHOWN WITH CHOCOLATE TEXTURED ACRYLIC (CTA)




## DIFFUSER OPTIONS



WHITE LINEN (WLA)



CHOCOLATE TEXTURED

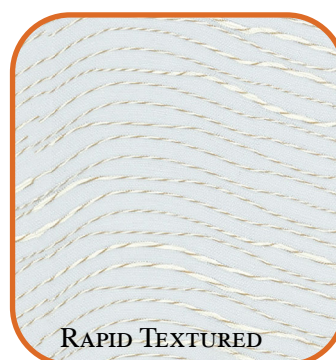


RAPID TEXTURED



BLACK TEXTURED



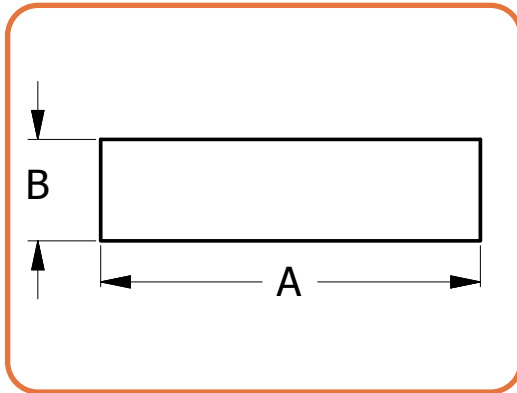

Shown with Battery Backup Extension Ring

	DIM 'A'	DIM 'B'
LCLC-12	12.25"	4.5"
LCLC-15	15"	4.5"
LCLC-19	19"	5.25"
LCLC-24	24"	8"
LCLC-30	30"	8"

## ORDERING INFORMATION

Example: LCLC-15-LED-F1P-4-W2-CTA-DIM

LCLC

Size	LED					Kelvin	Cage	Finish	Diffusers	Options	
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		(See Notes)	<b>WLA</b> White Linen Acrylic	<b>DIM</b> LED dimming driver (0 - 10v)	
12-LED	F1L	9	1400	0-10v	YES		<b>B1</b> Satin Black <b>B2</b> Text Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> Yolk White <b>W2</b> Gloss White <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter <b>W13</b> Pearl Beige  <b>Optional</b> (See Price List) <b>M17</b> Brass Powder	<b>CTA</b> Chocolate Textured Acrylic	<b>Optional Trim Options</b> (Consult Factory)	<b>DIMLD</b> Line Voltage /TRIAC/ELV/120v See Resource Page	
	F1O	10	863	TRIAC/ELV	YES						
	F1P	15	1361	TRIAC/ELV	YES						
15-LED	F1K	13	2115	0-10v	YES			<b>ES</b> Energy Star listed components	<b>T24</b> Title 24/JA8 Compliant (F1O, F1P & F1Q configuration only)	<b>RTA</b> Rapid Textured Acrylic	<b>CF - Center Finial</b>
	F1P	15	1361	TRIAC/ELV	YES						
	F1Q	23	2057	TRIAC/ELV	YES						
19-LED	L1A	36	4000	0-10v	NO			<b>OCCHFA</b> Concealed Occupancy Sensor See Sensor Resource Sheet	<b>Bottom Diffuser</b>	<b>BTA</b> Black Textured Acrylic	<b>Battery Backup Options</b> (Requires 1 3/4" extension ring) Available in LCLC-15, 19 & 24
	F1Q	23	2057	TRIAC/ELV	YES						
24-LED	L1A	36	4000	0-10v	NO			<b>BB10</b> 10 Watts (1170lm) for 90-Minutes	<b>WTA</b> White Textured Acrylic		
30-LED	O4C	36	4840	0-10v	NO						
	36-LED	O8C	72	9680	0-10v					NO	
		O12C	107	14520	0-10v			NO			

