

MITW-LED

Construction:

- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; Hardware Included
- Optional photocell (21) increases fixture depth 1 1/2"
- UL and CUL listed **WET** location
 - Build America, Buy America Act Compliant
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

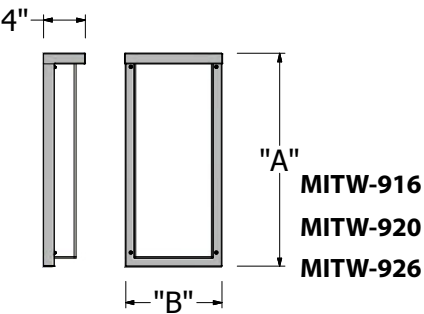

DIM 'A'	DIM 'B'	M.C.
16"	9"	8"
20"	9"	10"
26"	9"	13"



ORDERING INFORMATION

Example: MITW-920-LED-O6B29-3-Z3-WSA

MITW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
						2 3000K 3 3500K 4 4000K		B1 Satin Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) P2 Brushed Alum P9 Brushed Nickel	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) 21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt 42 All Aluminum Construction 39 J-Box with knockouts on all sides <i>No longer ADA</i> Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
916-LED	O3C18	18	2420	0-10v	NO					
920-LED	O6B29	29	4000	0-10v	NO					
926-LED	O6C18	18	2420	0-10v	NO					
	O6C36	36	4840	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286
 www.lightwayind.com • sales@lightwayind.com

