

MDIW-700-LED

Construction:

- Steel chassis and cage
- Diffuser is .10 extruded white acrylic

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots
- Top and bottom white acrylic lens - standard
- Optional photocell (21) increases fixture depth 1 1/2"
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components


Type:	
Job Name:	



Shown with cage style A

MDIW-XXX

Height- 16" - 26" - 38" - 50" - 60"
 Width - 6 3/4"
 Depth- 4"
 MC - 8" - 13" - 19" - 25" - 30"

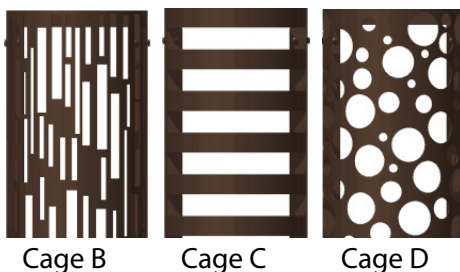

Cage B

Cage C

Cage D



ORDERING INFORMATION

Example: MDIW-726-LED-A-O2C-4-Z3-WSA

MDIW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
716-LED	O1C	9	1210	0-10v	NO	2 3000K	A	B1 Satin Black	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page 90CRI Consult Factory 21 Photocell - See Notes -01 120 volt -02 277 volt Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
726-LED	O2C	18	2420	0-10v	NO	4 4000K	B	B2 Text Black		
738-LED	O3C	27	3630	0-10v	NO	Optional 3 3500K	C	Z1 Satin Bronze		
750-LED	O4C	36	4840	0-10v	NO		D	Z3 Text Bronze		
							X	W1 Yolk White		
								W2 Gloss White		
								T4 Shimmer Gray		
								M13 Anod Silver		
								T6 Pewter		
								W13 Pearl Beige		
							Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum P9 Brushed Nickel			



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

