

# LCLH-LED

## Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.
- Canopy and housing are steel with a powder coated finish

## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LCLH has a typical leadtime of 6-weeks, consult with factory for any minimum order quantities and setup fees
- UL and CUL listed **DAMP** location
- LED Array
  - Replaceable Module
  - CRI > 80
  - Dimming (10% or 1%)
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components
- For a ceiling flush mounted version see the **LCLC**


Type:	
Job Name:	



Shown with White Linen Acrylic Side Lens & 1S15Stem





## DIFFUSER OPTIONS

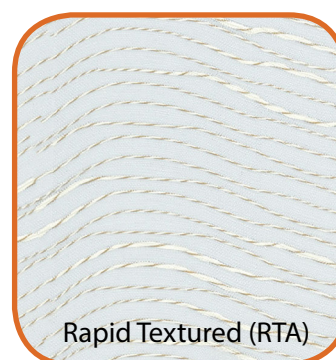


28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
[www.lightwayind.com](http://www.lightwayind.com) • [sales@lightwayind.com](mailto:sales@lightwayind.com)




# LCLH-LED

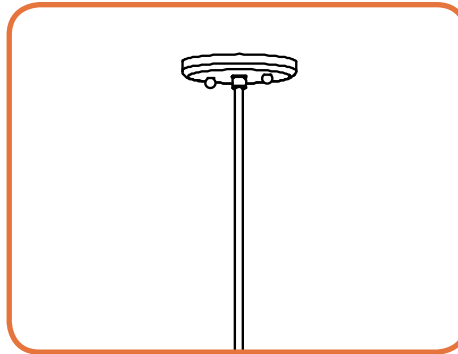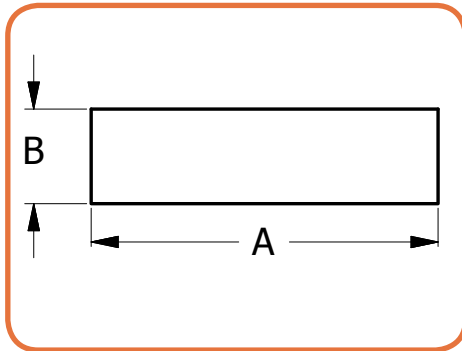


STEM OPTION -1S15

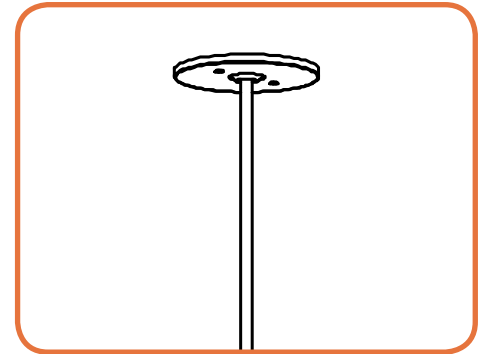

STEM OPTION -1SLM45

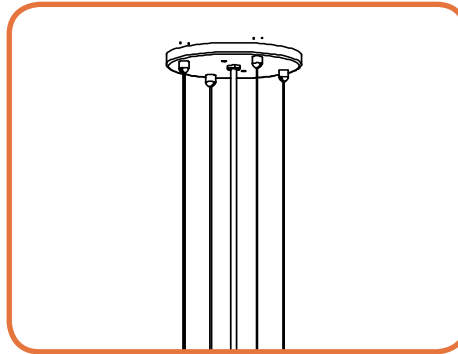

STEM OPTION -4AC-xSJ

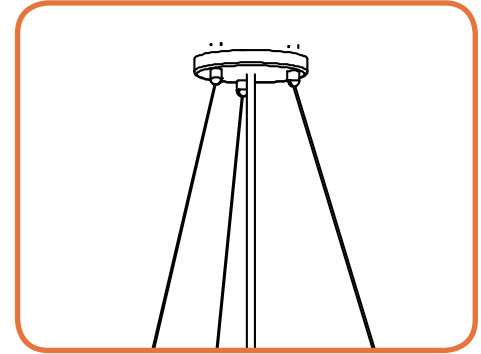

STEM OPTION -3AC-xSJ

	DIM 'A'	DIM 'B'	OAH
LCLH-12	12.25"	4.5"	12"
LCLH-15	15"	4.5"	12"
LCLH-19	19"	5.25"	12"
LCLH-24	24"	8"	15"
LCLH-30	30"	8"	24"
LCLH-36	36"	8"	24"

## ORDERING INFORMATION

Example: LCLH-15-LED-F1Q-4-W2-CTA-DIM-1SLM45-12OAH

### LCLH

Size	LED					Kelvin	Cage	Finish	Diffusers	Options			
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		<b>B1</b> Satin Black <b>B2</b> Text Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> Yolk White <b>W2</b> Gloss White <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter <b>W13</b> Pearl Beige  <b>Optional</b> (See Price List) <b>M17</b> Brass Powder	<b>WLA</b> White Linen Acrylic  <b>CTA</b> Chocolate Textured Acrylic  <b>Optional Trim Options</b> (Consult Factory)  <b>RTA</b> Rapid Textured Acrylic  <b>BTA</b> Black Textured Acrylic  <b>Bottom Diffuser</b>  <b>WTA</b> White Textured Acrylic	<b>(Suspension Systems)</b> Please list <b>Over All Height</b> <b>1S15</b> -Single Stem 15 degree swivel <b>1SLM45</b> -Single Stem 45 degree swivel <b>4AC</b> -(4) Aircraft Cable <b>3AC</b> -(3) Aircraft Cable  <b>DIM</b> LED dimming driver (0 - 10v) <b>DIMLD</b> Line Voltage /TRIAC/ELV/120v See Resource Page <b>ES</b> Energy Star listed components <b>90CRI</b> Consult Factory <b>OCCHFA</b> Concealed Occupancy Sensor See Sensor Resource Sheet  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes			
<b>12-LED</b>	<b>F1L</b>	9	1400	0-10v	YES	<b>Optional</b> 3 3500K							
	<b>F1O</b>	10	863	TRIAC/ELV	YES								
	<b>F1P</b>	15	1361	TRIAC/ELV	YES								
<b>15-LED</b>	<b>F1K</b>	13	2115	0-10v	YES								
	<b>F1P</b>	15	1361	TRIAC/ELV	YES								
	<b>F1Q</b>	23	2057	TRIAC/ELV	YES								
<b>19-LED</b>	<b>L1A</b>	36	4000	0-10v	NO								
<b>24-LED</b>	<b>L1A</b>	36	4000	0-10v	NO								
<b>30-LED</b>	<b>O4C</b>	36	4840	0-10v	NO								
<b>36-LED</b>	<b>O8C</b>	72	9680	0-10v	NO								
	<b>O12C</b>	107	14520	0-10v	NO								
	<b>8E26</b>		0	TRIAC/ELV	NO								



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com

