

BVPW-LED

Construction:

- Steel housing and chassis
- Bottom lens is white frosted or clear smooth acrylic, or optional clear prismatic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots left and right
- Optional Photocell – specify voltage
- Optional Battery backup
- Dark Sky compliant
- UL and CUL listed **WET** location
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

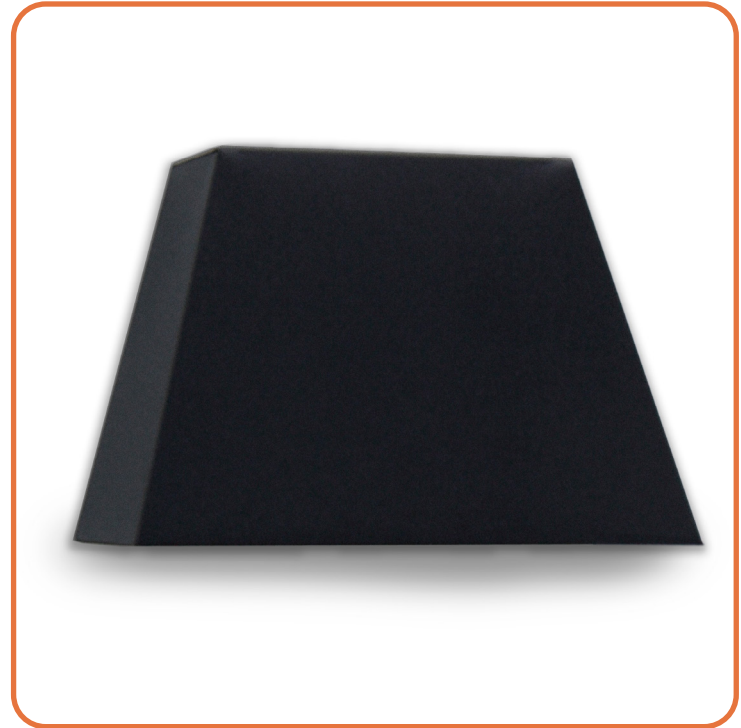

BVPW-9

Height - 9 1/4"
 Width - 16"
 Depth - 10 3/4"



ORDERING INFORMATION

Example: BVPW-9-LED-O4B-4-B1-CEG-T2-21-01

BVPW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder P2 Brushed Alum P9 Brushed Nickel	WFA White Frosted Acrylic CSA Clear Smooth Acrylic Optional Lens Material (See Price List) CPA Clear Prismatic Acrylic	DIM LED dimming driver (0 - 10v) 42 All Aluminum Construction 21 Photocell - See Notes -01 120 volt -02 277 volt Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
9-LED	O2B	15	2000	0-10v	NO					
	O4B	29	4000	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 www.lightwayind.com • sales@lightwayind.com

