

# BVWW-LED

## Construction:

- Steel housing and chassis
- Clear Smooth Acrylic Lens
- Optional White Frosted Acrylic Lens


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Integral mounting plate; keyhole slots left and right
- Optional aluminum construction (painted finish only)
- Optional battery backup
- Dark Sky compliant
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

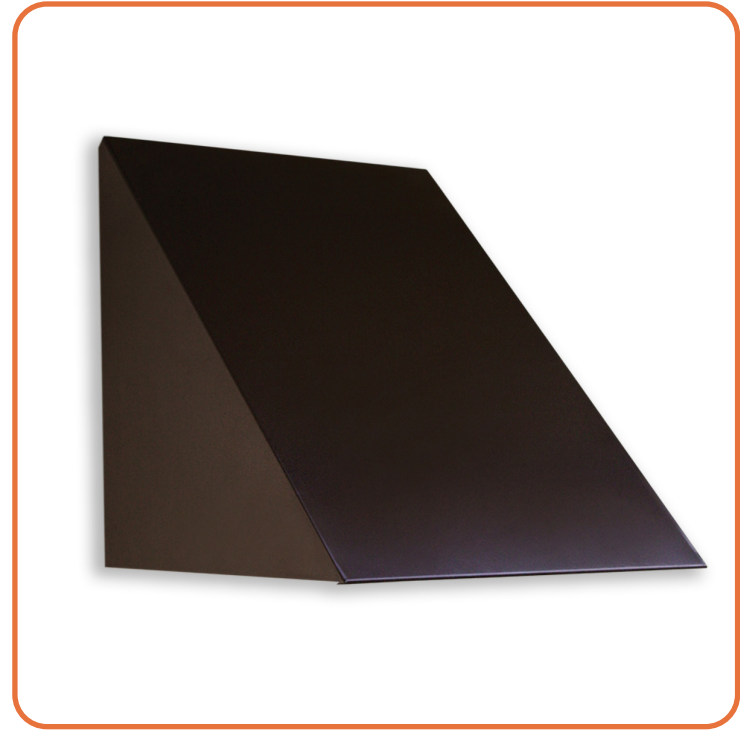

### BVWW-13

Height - 13 1/2"

Width - 12"

Depth - 13 3/4"



## ORDERING INFORMATION

Example: BVWW-13-LED-O4B-4-Z3-WSA

### BVWW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
13-LED	O2B	15	2000	0-10v	NO	1 2700K 2 3000K 3 3500K 4 4000K 5 5000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige  Optional (See Price List) M17 Brass Powder P2 Brushed Alum	CSA Clear Smooth Acrylic WSA White Smooth Acrylic WFA White Frosted Acrylic	DIM LED dimming driver (0 - 10v)  42 All Aluminum Construction  21 Photocell - See Notes -01 120 volt -02 277 volt  OCCHFA Concealed Occupancy Sensor  Optional Voltage -347V Input voltage to 347v  Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
	O4B	29	4000	0-10v	NO					



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com



Revision: 02/27/2025