



# MINW Series



Bill Russ  
Photography




B1 Satin Black



B2 Textured Black



M13 Anodized Silver



T6 Pewter




P9 Brushed Nickel



W13 Pearl Beige




W1 Yolk White



Z1 Satin Bronze



Z3 Textured Bronze




T4 Shimmer Gray



P2 Brushed Aluminum



W3 Textured White



W2 Gloss White



28435 Industry Drive., Valencia, California 91355  
800-325-4448 / 661-257-0286  
www.lightwayind.com • sales@lightwayind.com



Revision: 05/08/2026

# MINW-LED

## Construction:

- Housing and chassis is steel
- Diffuser UV-stabilized, high impact resistant, DR acrylic
- Accent bars and rings are extruded aluminum

## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Integral mounting plate; keyhole slots left and right
- Top and bottom white acrylic lens – standard
- Not all material and accent styles are available
- Optional lens cover (ALC) eliminates up/down light
- Optional photocell (21) increases fixture depth 1 ½"
- BUG Rating: B0 - U3 - G2
- UL and CUL listed **WET** location
  - Build America, Buy America Act Compliant
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	



## MINW

Height - 16" - 20" - 26" - 38" - 50"

Width - 9"

Depth - 4"

MC - 8" - 10" - 13" - 19" - 25"



## ORDERING INFORMATION

Example: MINW-920-LED-O2C-4-B-Z3-WSA

## MINW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
						2 3000K 3 3500K 4 4000K	A B C D	B1 Satin Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic  Optional Cage Accents (See Page 2)  Material S Solid P Perforated Screen W Waffle Pattern Style SC Screen Complete CC Center Complete CH Center Half EC Ends Complete SF Sides Full CF Center Full	DIM LED dimming driver (0 - 10v) Dimming to 10% <b>(Included)</b>  21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt  42 All Aluminum Construction  ALC Aluminum Lens Cover - See Notes 39 J-Box with knockouts on all sides  Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
916-LED	O2C	18	2420	0-10v	NO					
920-LED	O2C	18	2420	0-10v	NO					
	O4B	29	4000	0-10v	NO					
926-LED	O2C	18	2420	0-10v	NO					
	O4C	36	4840	0-10v	NO					
938-LED	O3C	27	3630	0-10v	NO					
	O6C	54	7260	0-10v	NO					
950-LED	O4C29	29	3412	0-10v	NO					
	O4C	36	4840	0-10v	NO					
	O8C	72	9680	0-10v	NO					
								Optional (See Price List) P2 Brushed Alum P9 Brushed Nickel		



28435 Industry Drive., Valencia, California 91355

800-325-4448 / 661-257-0286


www.lightwayind.com • sales@lightwayind.com



# MINW

## Cage Styles and Accents

### Cage Styles

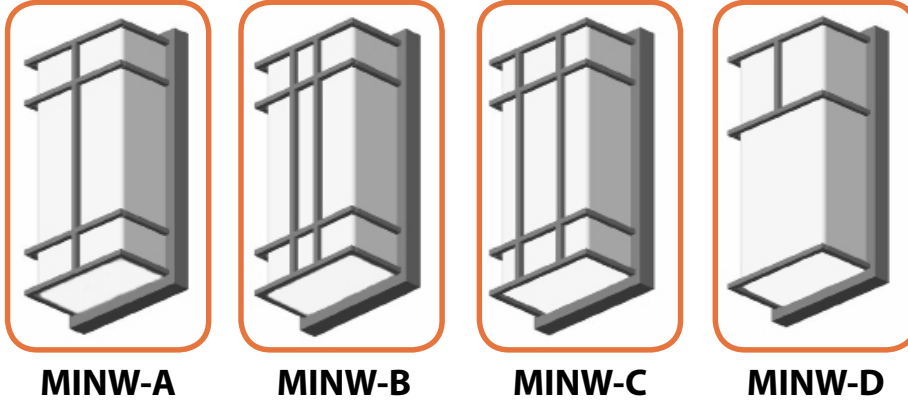


### OPTIONAL CAGE ACCENTS

(Not required, leave blank if undesired)


#### 1) Optional Accent Location

(Shown as "C" cage. Others are Similar)

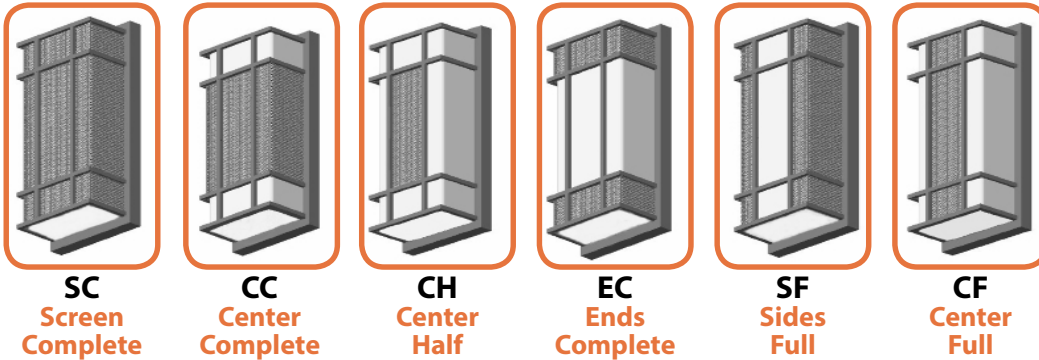

#### 2) Accent Material

(Required if Accent is chosen)

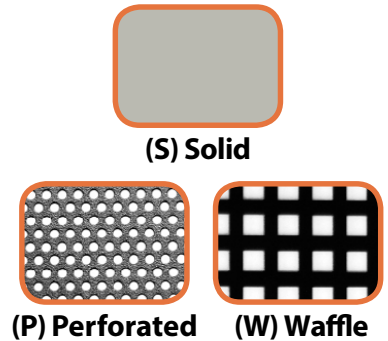

### ACCENT AVAILABILITY CHART BY CAGE STYLE

	A	B	C	D
SC	S,P,W	S,P,W	S,P,W	S,P,W
CC	S,P,W	S,P,W	S,P,W	---
CH	---	S,P,W	S,P,W	---
EC	S,P,W	S,P,W	S,P,W	S,P,W
SF	---	S,P,W	S,P,W	---
CF	---	S,P,W	S,P,W	---



28435 Industry Drive., Valencia, California 91355  
 800-325-4448 / 661-257-0286 •  
[www.lightwayind.com](http://www.lightwayind.com) • [sales@lightwayind.com](mailto:sales@lightwayind.com)



Revision: 05/08/2026