ARCHITECTURAL EXTERIOR LIGHTING

MEUW-LED

A clean vertical profile.
Light across five sides.



Designed to define an entrance

Five heights / 0-10V dimming / WET location / ADA compliant

LIGHT IN CONTEXT

A welcome after dark

A slender illuminated form brings a consistent architectural rhythm to transit facilities, parking structures and building entries.



TRANSIT ARRIVALS



PARKING ENTRANCES

MATERIAL AND SCALE

A profile that belongs

Pair the rectangular silhouette with stone, metal and contemporary facades. Select from five heights to suit the scale of the elevation.



OFFICE ENTRANCES



The finish in daylight


The T6 Pewter application view shows the fixture against a textured wall. The narrow frame gives the diffuser a crisp architectural edge.

Available heights
13 / 18 / 26 / 38 / 50 inches

BUILT FOR THE EXTERIOR

Five sides of illumination

Steel construction and a UV-stabilized, high-impact-resistant DR acrylic diffuser combine in a simple rectangular wall sconce.

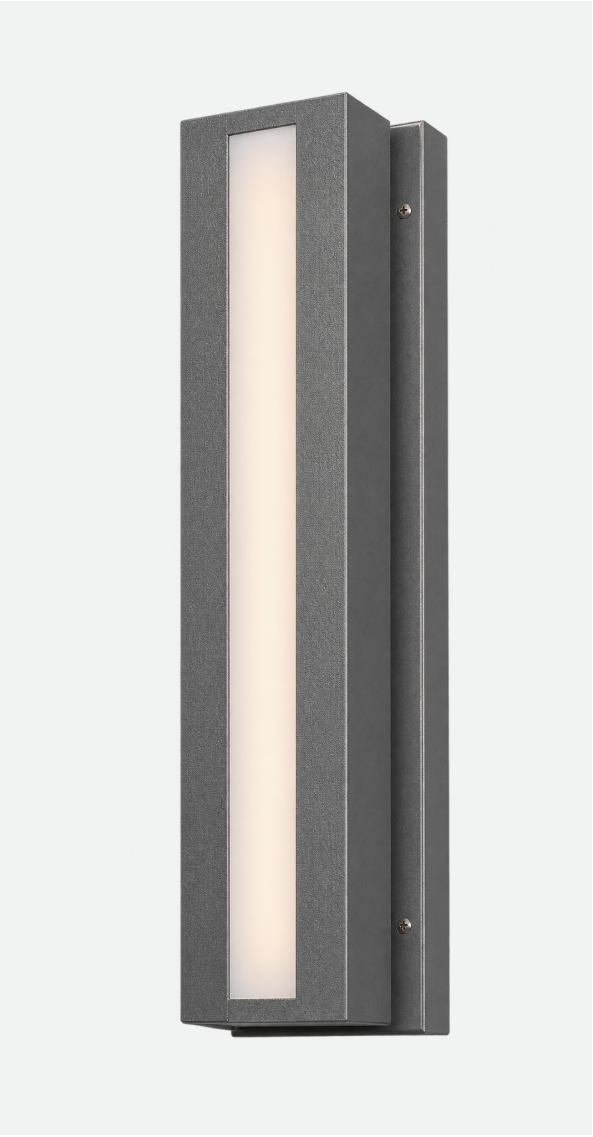

Acrylic on five sides

White smooth acrylic softens the LED source and carries light around the fixture.

Straightforward installation

Integral mounting plate and included hardware for mounting on a standard junction box.

Control comes standard

0-10V dimming to 10% and universal 120/277V operation.

Options for the project

Photocell, all-aluminum construction and battery backup on MEUW-526 and larger.

DIMMABLE | WET | ADA | UL / CUL | BABA | 5 YEAR

SELECT AND CONFIGURE

MEUW-LED specifications

SIZE AND LED SOURCE

Model	Height	Mount center	LED code	Watts	Source lumens
MEUW-513	13"	6.5"	O1B	8	1,000
MEUW-518	18"	9"	O2A	12	1,600
MEUW-526	26"	13"	O2C	18	2,420
MEUW-538	38"	19"	O3C	27	3,630
MEUW-550	50"	25"	O4C	36	4,840

All sizes: 5.5" width x 4" depth. Photocell adds 0.5" to depth. Lumen values are LED source lumens, not delivered fixture lumens.

STANDARD PERFORMANCE

Voltage 120/277V universal

Dimming 0-10V to 10%, included

Color quality CRI >90

CCT codes 2 = 3000K; 3 = 3500K; 4 = 4000K

Diffuser WSA = White Smooth Acrylic

Listing UL / CUL, WET location

Accessibility ADA compliant

Origin Build America, Buy America compliant

Warranty 5 years on LED components

Energy Star No, all listed configurations

CONFIGURATION AND OPTIONS

Example MEUW-526-LED-O2C-3-Z3-WSA
26" height / 18W / 3500K / Textured Bronze / White Smooth Acrylic

DIM 0-10V dimming driver, included

21 Photocell: specify 01 = 120V or 02 = 277V

42 All-aluminum construction

BB10 Battery backup: 10W (1,170 lm), 90 minutes; MEUW-526 and larger only

Ordering data: MEUW-LED specification, revision 10/31/2024. Additional CCTs, dimming methods and extended warranty options: consult factory.

COORDINATE THE DETAILS

A finish for the architecture

Explore the Lightway finish palette, then select the MEUW finish code for your project. Custom finishes are available by consultation.



Finish chart is a visual reference. Palette names and standard/optional designations may vary by product; confirm MEUW availability and pricing with the factory. Printed colors are approximate.

MEUW FINISH CODES

B1 Satin Black / B2 Textured Black
Z1 Satin Bronze / Z3 Textured Bronze
W1 Yolk / W2 Gloss White / W3 Textured White
T4 Shimmer Gray / T6 Pewter
M13 Anodized Silver / W13 Pearl Beige
P2 Brushed Aluminum (optional; see price list)

