



ARCHITECTURAL LED PENDANT



LEXH-LED

Geometry, suspended in light.

An inverted-pyramid pendant in aluminum and steel, with glowing white acrylic faces that turn any open ceiling into an architectural statement. Dimmable, field-serviceable and built in America.

UL / CUL LISTED

DAMP LOCATION

BABA COMPLIANT


0-10V DIMMING



DESIGN INTENT

A focal point for the spaces people remember.

The LEXH-LED pairs a crisp aluminum frame with luminous acrylic faces that read as pure geometry from every angle. Suspended on four aircraft cables, it floats above lobbies, lounges and collaboration areas, delivering soft, even, high-CRI light with smooth 0–10V dimming. Custom overall heights and multiple canopy and stem options let one fixture adapt to every ceiling.

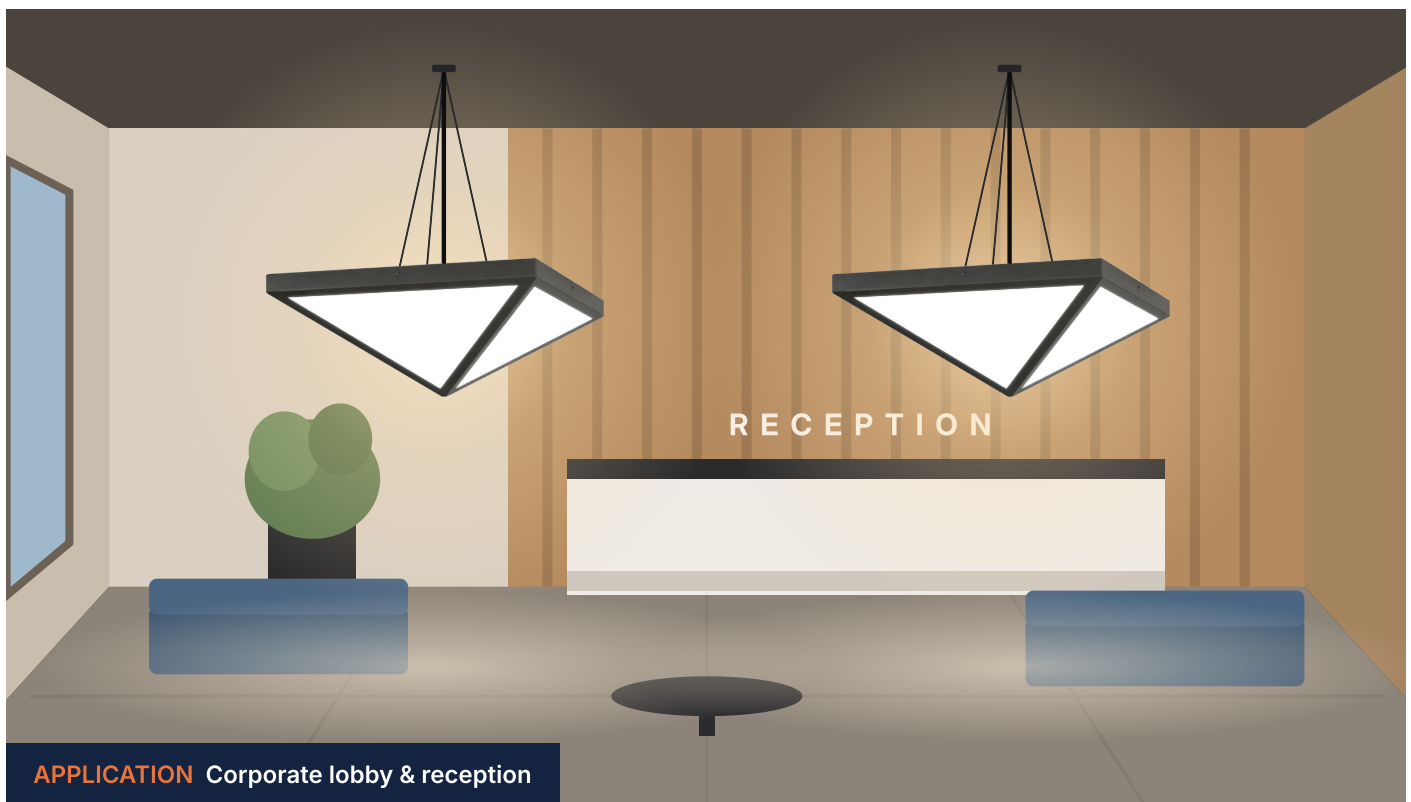

Application concept: actual LEXH-LED product image shown in an illustrated setting, not a photograph of an installed project.

IDEALLY SUITED FOR

Corporate lobbies

Reception & arrival

Open-plan offices

Collaboration zones

Hospitality

Hotel lounges & lobbies

Retail showrooms

Feature displays


Higher education

Libraries & atriums

APPLICATIONS

One form. Many settings.

Application concepts: actual LEXH-LED product image in illustrated settings, not photographs of installed projects.

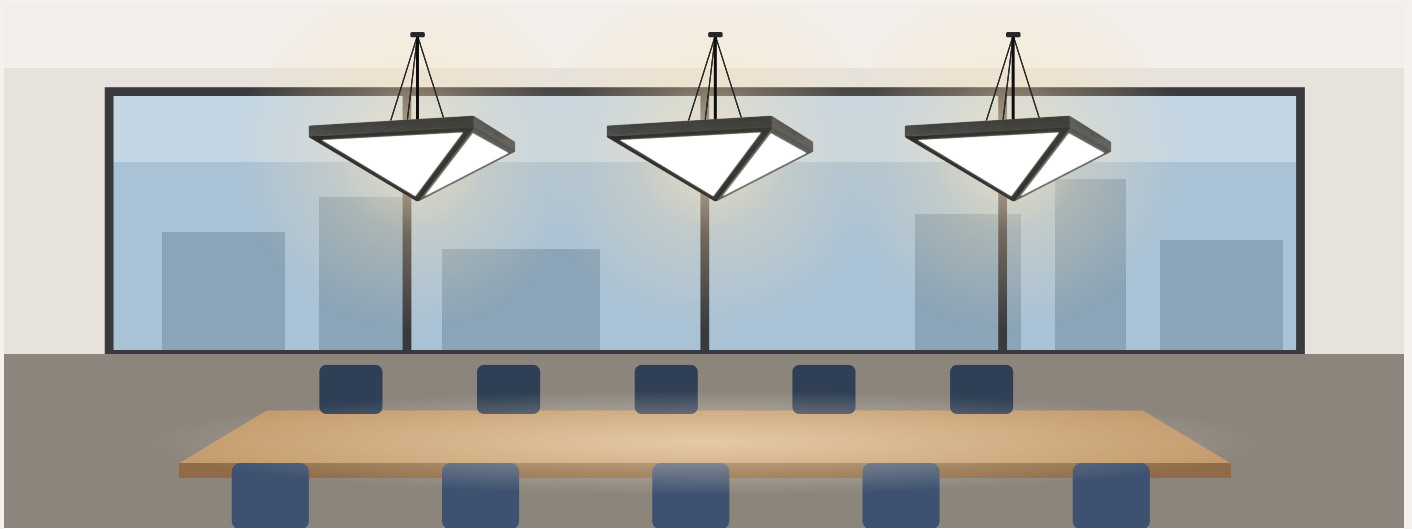


Conference & open-plan office

A row of LEXH-LED pendants defines the meeting zone and delivers even, glare-controlled task light over the table, with 0–10V dimming for presentations.



Hotel lounge

A single statement pendant anchors the seating group; warm 2700K or 3000K CCT sets a relaxed, residential mood.

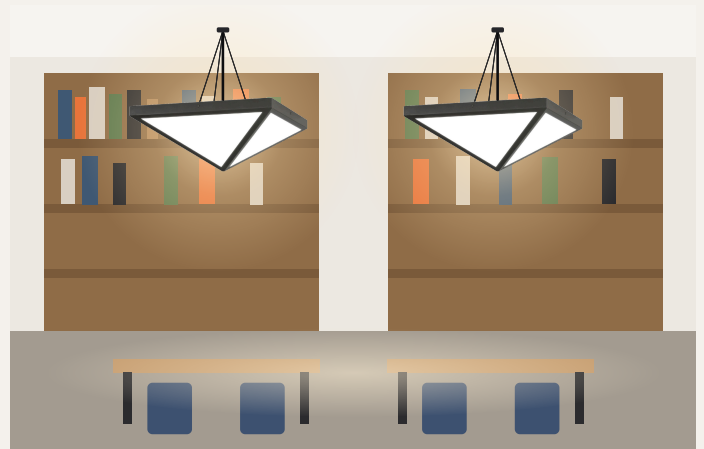

Library & campus commons

High-CRI light over study tables renders books and faces naturally; 4000K suits focused reading areas.

>90

CRI STANDARD

1%

0–10V DIMMING

60K+

HOURS LUMEN MAINT.

5 CCT

2700K TO 5000K

KEY FEATURES & OPTIONS

Built to specify with confidence.

- **Aluminum housing, steel chassis** with white smooth acrylic lens
- **0-10V dimming** standard, smooth to 10% or 1%
- **Field-replaceable LED module**, CRI > 90, 3-step MacAdam binning
- **Universal 120-277V** integral driver
- **Suspension:** (4) aircraft cable with cord; mounting kit for standard J-box
- **Multiple canopy and stem options** plus custom overall heights
- **Battery backup option:** BB10, 90-minute emergency operation (0-10V only)
- **UL and CUL listed** for damp locations
- **Build America, Buy America Act compliant** and made in America
- **Warranty:** 5-year on LED components, optional 10-year available
- **Lead time:** typically 6 weeks



36"

WIDTH

12"

HEIGHT

108"

STD. OAH

CONFIGURATIONS

LED	Watts	Source Lumens	Dimming
O8C	72	9,680	0-10V
O12C	107	14,520	0-10V

COLOR TEMPERATURE

2700K 3000K 3500K 4000K 5000K

FINISHES

Satin Black Satin Bronze Text Bronze Gloss White
Anod Silver Brass Powder (optional) Custom

Specify the LEXH-LED for your next project.

28435 Industry Drive, Valencia, California 91355

800-325-4448 · 661-257-0286 · sales@lightwayind.com · lightwayind.com

