

TEDW-LED

Construction:


- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; Hardware include
- Mounts on a Standard J-Box
- Lens on all five sides
- Optional battery backup available on fixtures 627 & larger
- Optional photocell (21) increases fixture depth 1/2"
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
 - Build America, Buy America Act Compliant
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components




-627

-638

W	H	D	Mount-Center
6"	27"	5"	13 1/2"
6"	38"	5"	19"

Type:	
Job Name:	

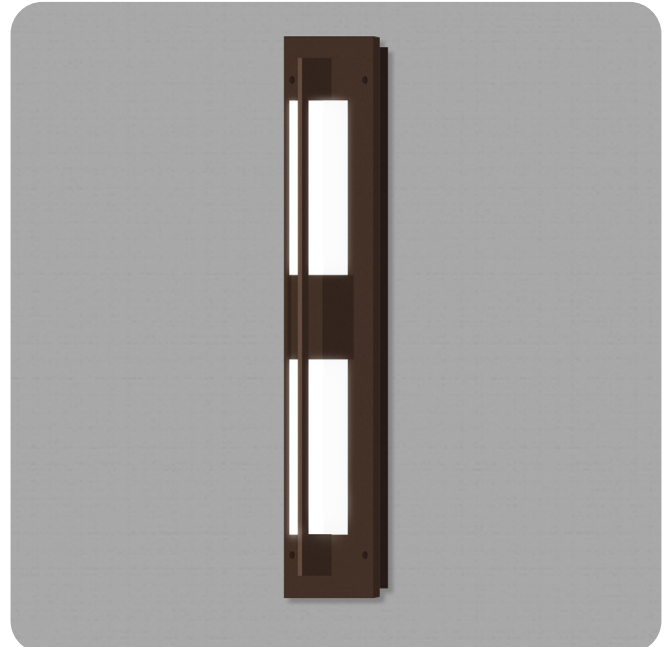

ORDERING INFORMATION

Example: TEDW-627-LED-O2C-3-Z3-WSA

TEDW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Delivered Lumens	Dimming	Energy Star					
627-LED	O2C	18	990	0-10v	NO	1 2700K 2 3000K 3 3500K 4 4000K 5 5000K		B1 Satin Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) P2 Brushed Alum M17 Brass Powder	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page 21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt 42 All Aluminum Construction Battery Backup Options BB10 10 Watts (1170lm) for 90-Minutes
638-LED	O3C	27	1320	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286
www.lightwayind.com • sales@lightwayind.com



Revision: 08/17/2026