

# ORMW-LED

## Construction:

- Full woven mesh shield; steel chassis
- Diffuser is white textured polycarbonate behind mesh shield


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Keyhole slots or center lockup for standard J-box
- Open top and bottom
- ADA compliant
- Optional Battery Backup
- UL and CUL listed **DAMP** location
- LED Components
  - Replaceable Module
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

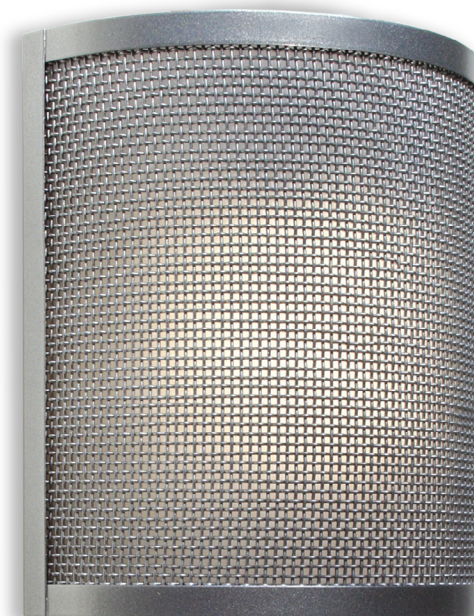

## ORMW-11-LED

Height - 11"  
Width - 10"  
Depth - 4"



## ORDERING INFORMATION

Example: **ORMW-11-LED-F1H-4-T6-MCC**

## ORMW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options	
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		<b>B1</b> Satin Black <b>M13</b> Anod Silver <b>T4</b> Shimmer Gray <b>T6</b> Pewter <b>W2</b> Gloss White <b>W1</b> Yolk White <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze	<b>MCC</b> Full Woven Mesh Shield with White Textured Polycarbonate	<b>DIM</b> LED dimming driver (0 - 10v) <b>DIMLD</b> Line Voltage /TRIAC/ELV/120v See Resource Page  <b>ES</b> Energy Star listed components <b>90CRI</b> Consult Factory  Optional Voltage <b>-347V</b> Input voltage to 347v  <b>OCCHFB</b> Concealed Occupancy Sensor ( <b>O2A</b> Configuration Only) See Sensor Resource Sheet  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes	
<b>11-LED</b>	<b>F1H</b>	9	1400	0-10v	YES	<b>Optional</b> 3 3500K					
	<b>F1O</b>	10	863	TRIAC/ELV	YES						
	<b>F1P</b>	15	1361	TRIAC/ELV	YES						
	<b>O2A</b>	12	1600	0-10v	NO						
	<b>F1J</b>	20	2820	0-10v	YES						
							<b>Optional Finishes</b> (see Price List) <b>M17</b> Brass Powder <b>M16</b> Antique Brass				



28435 Industry Drive., Valencia, California 91355  
West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
East Coast Sales: 866-350-0991 • fax 866-490-5754  
www.lightwayind.com • sales@lightwayind.com

