

# DYRH-LED

## Construction:

- Steel Housing and Chassis
- Diffuser is White Textured Polycarbonate
- Double Rigid Stems Standard


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:


- Mounts to Standard Junction Box
- UL and CUL listed **DAMP** location
- Optional Battery Backup
- Custom Stem Lengths available - Consult Factory
- LED Components
  - Replaceable Modules
  - CRI > 80
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

|           |  |
|-----------|--|
| Type:     |  |
| Job Name: |  |

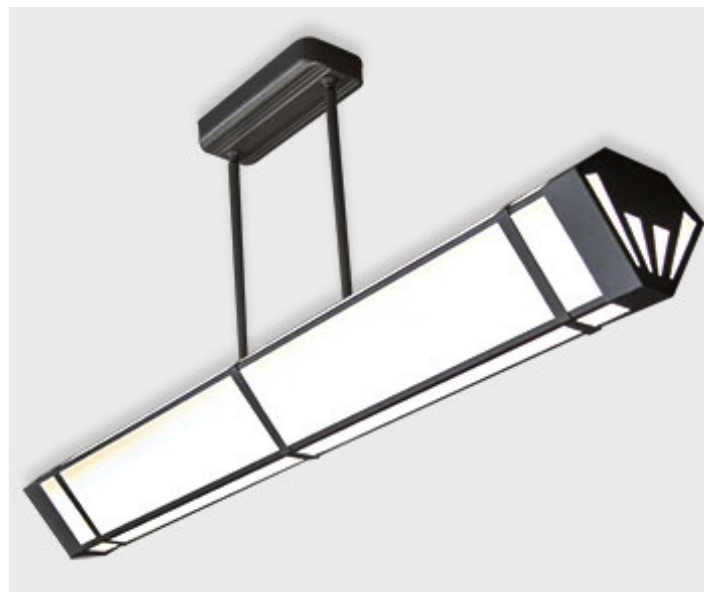

Shown as DYRH-50

|     | DYRH-26 | DYRH-50 |
|-----|---------|---------|
| A   | 26"     | 50"     |
| B   | 6"      | 6"      |
| C   | 9"      | 9"      |
| D   | 12"x 6" | 12"x 6" |
| OAH | 24"     | 24"     |

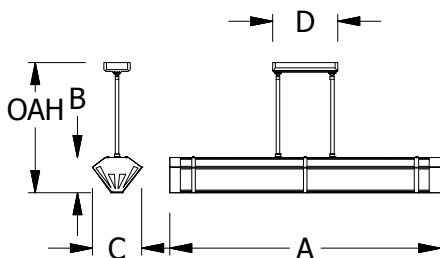

## ORDERING INFORMATION

Example: **DYRH-50-LED-O4C-4-M13-WTP-2S10-24"OAH**

### DYRH

| Size          | LED        |       |               |         |             | Kelvin                     | Cage | Finish  | Diffusers                               | Options  |
|---------------|------------|-------|---------------|---------|-------------|----------------------------|------|---|---|--|
|               |            | Watts | Source Lumens | Dimming | Energy Star | 2 3000K<br>4 4000K         |      | <b>B1</b> Satin Black<br><b>B2</b> Text Black<br><b>Z1</b> Satin Bronze<br><b>Z3</b> Text Bronze<br><b>W1</b> Yolk White<br><b>W2</b> Gloss White<br><b>T4</b> Shimmer Gray<br><b>M13</b> Anod Silver<br><b>T6</b> Pewter<br><b>W13</b> Pearl Beige | <b>WTP</b> White Textured Polycarbonate | <b>(Suspension Systems)</b><br>Please list <b>Over All Height</b><br><b>2S10</b> - Dual Rigid 10deg Swivel Stem<br><b>2ACBSJ</b> - 2 AirCraft -Black SO cord<br><br><b>xxOAH</b> -Custom Height<br><br><b>DIM</b> LED dimming driver (0 - 10v)<br><b>DIMLD</b> Line Voltage /TRIAC/ELV/120v<br>See Resource Page<br><br><b>90CRI</b> Consult Factory<br><br><b>Battery Backup Options</b><br>(Available with 0-10v only)<br><b>BB10</b> 10 Watts (1170lm) for 90-Minutes |
| <b>26-LED</b> | <b>O2C</b> | 18    | 2420          | 0-10v   | NO          | <b>Optional</b><br>3 3500K |      | <b>Optional</b><br>(See Price List)<br><b>M17</b> Brass Powder  |   |  |
| <b>50-LED</b> | <b>O4C</b> | 36    | 4840          | 0-10v   | NO          |                            |      |   |   |  |



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com

