

# REIW Series LED

## Construction:


- Steel housing and chassis
- White textured polycarbonate lens

## Light Source:


- LED
- Dimming to 10% **Included**

## Notes:

- Mounting - See notes below dimensions
- Horizontal or vertical mounting
- ADA compliant
- Optional battery backup
- UL and CUL listed DAMP location
- LED Components
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components



Type:	
Job Name:	

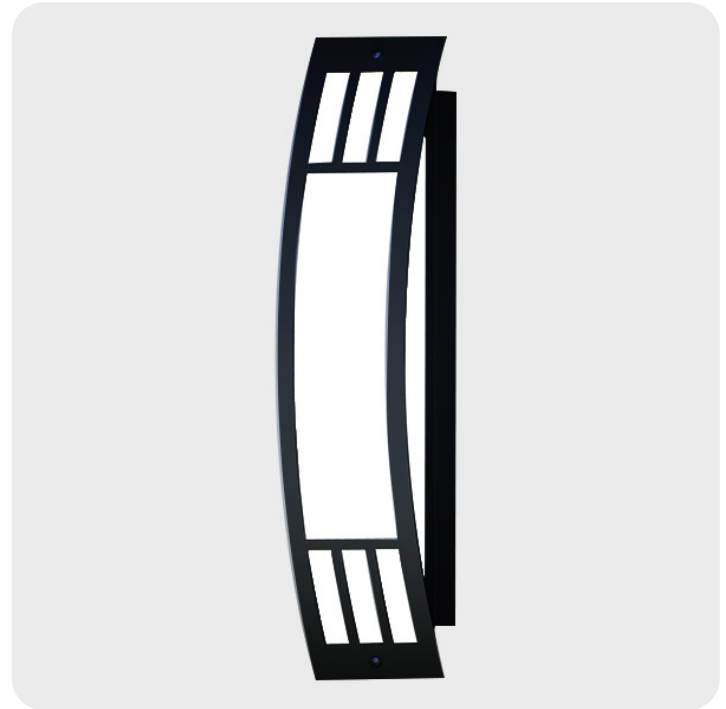

<b>REIW-315</b>	<b>REIW-326</b>	<b>REIW-415</b>	<b>REIW-426</b>
Height - 15"	Height - 26"	Height - 15"	Height - 26"
Width - 3"	Width - 3"	Width - 4.25"	Width - 4.25"
Depth - 4"	Depth - 4"	Depth - 4"	Depth - 4"

Mounts to 2 x 4 box/opening oriented to match fixture's linear dimension

Mounts to standard J box



## Example: REIW-326-LED-O2C-3-T6-WTP

## REIW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
315-LED	O1C	9	1210	0-10v	NO	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White W3 Text White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WTP White Textured Polycarbonate	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page
326-LED	O2C	18	2420	0-10v	NO			Optional Lens Material (see Price List)	WLA White Linen Acrylic RTA Rapid Textured Acrylic	ES Energy Star listed components T24 Title 24/JA8 Compliant (F1Y configuration only)
	F1Y	30	3235	TRIAC/ELV	YES					
426-LED	O2C	18	2420	0-10v	NO			Optional (See Price List)		Battery Backup Options (415 & 426 Series only) BB10 10 Watts (1170lm) for 90-Minutes
	F1Y	30	3235	TRIAC/ELV	YES					



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com

