

TCMC-LED

Construction:

- Steel pan
- Diffuser is clear fluted acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Keyhole slots for standard J-Box installation
- Optional aluminum pan
- Optional battery backup - Requires 1 3/4" extension ring (TCMC-14 only)
- UL and CUL listed DAMP location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

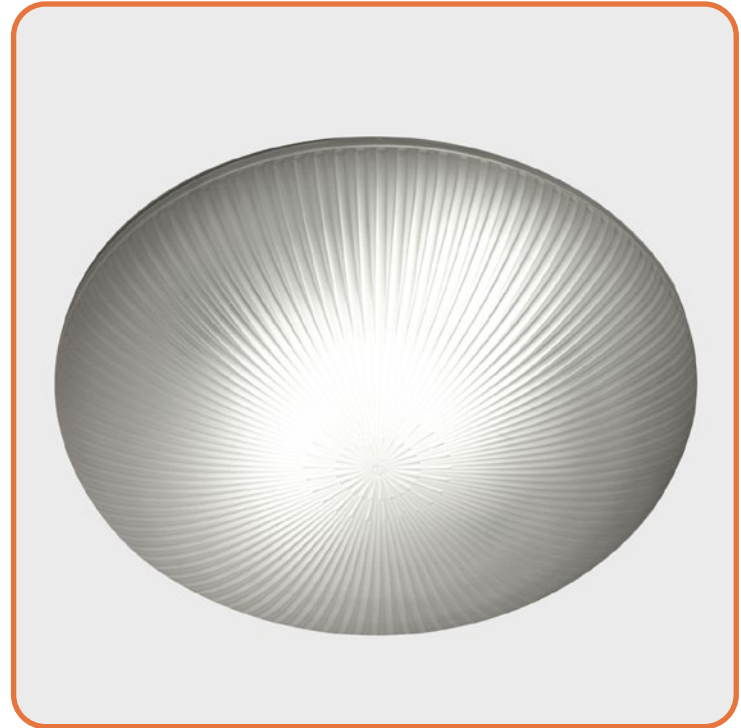

TCMC-11-LED
Height - 3"
Diameter - 11"

TCMC-14-LED
Height - 3 1/2"
Diameter - 14"



ORDERING INFORMATION

Example: TCMC-14-LED-F1Q-4-W2-CUA

TCMC

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K		W2 Gloss White	CUA Clear Fluted Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page ES Energy Star listed components 90CRI Consult Factory 42 All Aluminum Construction OCCHFA Concealed Occupancy Sensor See <i>Sensor Resource Sheet</i> Battery Backup Options (Requires 1 3/4" extension ring) TCMC-14-LED only (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
11-LED	F1L	9	1400	0-10v	YES	Optional 3 3500K				
	F1O	10	1065	TRIAC/ELV	YES					
	F1P	15	1724	TRIAC/ELV	YES					
14-LED	F1K	13	2115	0-10v	YES					
	F1P	15	1724	TRIAC/ELV	YES					
	F1Q	23	2540	TRIAC/ELV	YES					
	F1R	28	4015	0-10v	YES					



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

