

# LDGC-LED

## Construction:

- Diffuser is white washable textured acrylic with a variety of side decorative Laminated Surface Diffusers


## Light Source:

- LED
- Dimming to 10% **Included**


## Notes:

- Keyhole slots for standard J-box
- Optional battery backup - Requires 1 3/4" extension ring (15" & 19" only)
- The LDGC has a typical leadtime of 6-weeks
- UL and CUL listed **DAMP** location
- LED Array
  - Replaceable Module
  - CRI > 80
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

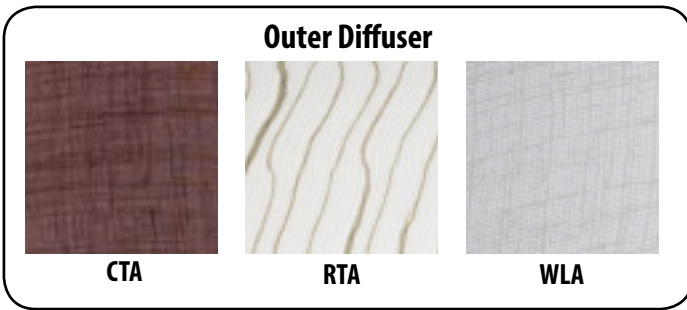

	LDGC-12	LDGC-15	LDGC-19
A	12.25"	15"	19.25"
B	6.38"	6.38"	6.38"
C	8"	10"	12.25"
D	4.50"	4.50"	4.50"
E	1.88"	1.88"	1.88"



## ORDERING INFORMATION

**Example: LDGC-15-LED-F2K-4-WTA-RTA-DIM**

### LDGC

Size	LED					Kelvin	Cage	Inner Diffuser	Outer Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
12-LED	F1L	9	1400	0-10v	YES	2 3000K 4 4000K  Optional 3 3500K		WTA White Textured Acrylic	CTA Chocolate Textured Acrylic WLA White Linen Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page  ES Energy Star listed components 90CRI Consult Factory  42 Aluminum Pan (12" & 15" only)  OCCHFA Concealed Occupancy Sensor See Sensor Resource Sheet  <b>Battery Backup Options</b> (Requires 1 3/4" extension ring) <b>LDGC-15 &amp; 19 only</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
	F1O	10	863	TRIAC/ELV	YES					
	F1P	15	1361	TRIAC/ELV	YES					
	2E26		0	TRIAC/ELV	NO					
15-LED	F1K	13	2115	0-10v	YES			Optional Trim Options (Consult Factory) RTA Rapid Textured Acrylic BTA Black Textured Acrylic		
	F1P	15	1361	TRIAC/ELV	YES					
	F1Q	23	2057	TRIAC/ELV	YES					
	2E26		0	TRIAC/ELV	NO					
19-LED	L1A	36	4000	0-10v	NO					
	2E26		0	TRIAC/ELV	NO					



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 East Coast Sales: 866-350-0991 • fax 866-490-5754  
 www.lightwayind.com • sales@lightwayind.com

