



Classic linen shades bring timeless charm and sophistication, effortlessly elevating any light fixture. Lightway's bonded linen lens combines this traditional appeal with modern functionality, featuring the durability and easy maintenance of acrylic—simply clean with a damp cloth to remove dust or dirt.

A wide range of standard finishes, a concealed infrared occupancy sensor, and an integral battery backup are just a few of the customizable options available. Designed with universal 120/277 voltage and backed by a 5-year warranty on LED components, these fixtures are available in a variety of colors and sizes. Proudly made in America, they also pair beautifully with companion pendant mount (LCLH) fixtures.



LCLC-LED

Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.

Light Source:

- LED
- Incandescent socket base


Notes:


- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LCLC has a typical lead time of 6 weeks, consult factory for any minimum order quantities and setup fees
- Finish options applies only with optional battery backup extension ring
- **Build America, Buy America Act Compliant**
- UL and CUL listed **DAMP** location
- LED Array
 - Replaceable Module
 - CRI > 90
 - Dimming (10% or 1%)
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components
- For a pendant mounted version see the **LCLH**

| | |
|-----------|--|
| Type: | |
| Job Name: | |



DIFFUSER OPTIONS

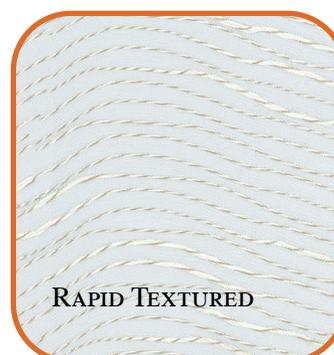

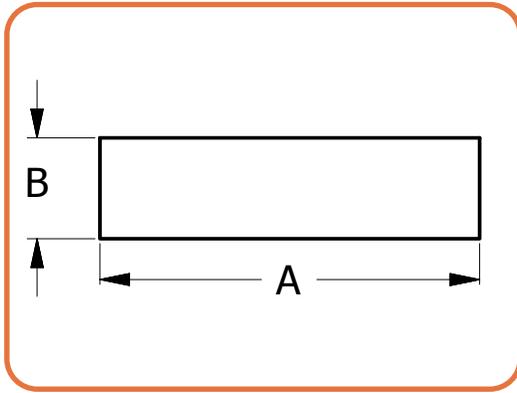

Shown with Battery Backup Extension Ring

| | DIM 'A' | DIM 'B' |
|---------|---------|---------|
| LCLC-12 | 12.25" | 4.5" |
| LCLC-15 | 15" | 4.5" |
| LCLC-19 | 19" | 5.25" |
| LCLC-24 | 24" | 8" |
| LCLC-30 | 30" | 8" |
| LCLC-36 | 36" | 8" |




LED BASED ORDERING INFORMATION

Example: LCLC-15-LED-F1P-4-W2-CTA-DIM

LCLC

| Size | LED | | | | | Kelvin | Cage | Finish | Diffusers | Options |
|--------|------|-------|---------------|-----------|-------------|---------|------|--|---|---|
| | | Watts | Source Lumens | Dimming | Energy Star | | | | | |
| 12-LED | F1L | 9 | 1400 | 0-10v | YES | 1 2700K | | <i>(See Notes)</i> See finishes on page 5 | WLA White Linen Acrylic | DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page ES Energy Star listed components T24 Title 24/JA8 Compliant (F10, F1P & F1Q configuration only) CF - Center Finial OCCHFA Concealed Occupancy Sensor See Sensor Resource Sheet Battery Backup Options <i>(Requires 1 3/4" extension ring)</i> Available in LCLC-15, 19 & 24 BB10 10 Watts (1170lm) for 90-Minutes |
| | F1O | 10 | 863 | TRIAC/ELV | YES | 2 3000K | | | CTA Chocolate Textured Acrylic | |
| | F1P | 15 | 1361 | TRIAC/ELV | YES | 3 3500K | | | Optional Trim Options (Consult Factory) | |
| | | | | | | 4 4000K | | | SLA Sable Linen Acrylic | |
| | | | | | | 5 5000K | | | RTA Rapid Textured Acrylic | |
| 15-LED | F1K | 13 | 2115 | 0-10v | YES | | | BTA Black Textured Acrylic | | |
| | F1P | 15 | 1361 | TRIAC/ELV | YES | | | | | |
| | F1Q | 23 | 2057 | TRIAC/ELV | YES | | | | | |
| 19-LED | L1A | 36 | 4000 | 0-10v | NO | | | | | |
| | F1Q | 23 | 2057 | TRIAC/ELV | YES | | | | | |
| 24-LED | L1A | 36 | 4000 | 0-10v | NO | | | | | |
| 30-LED | O4C | 36 | 4840 | 0-10v | NO | | | | | |
| 36-LED | O8C | 72 | 9680 | 0-10v | NO | | | | | |
| | O12C | 107 | 14520 | 0-10v | NO | | | | | |



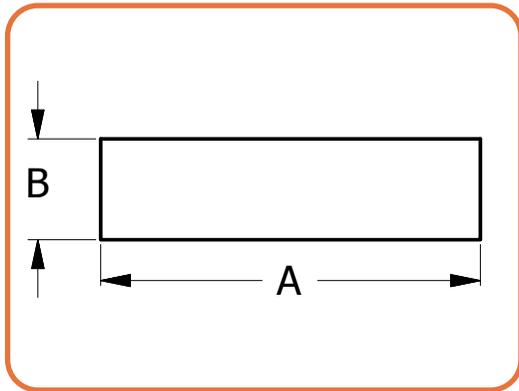

| | DIM 'A' | DIM 'B' |
|---------|---------|---------|
| LCLC-12 | 12.25" | 4.5" |
| LCLC-15 | 15" | 4.5" |
| LCLC-19 | 19" | 5.25" |
| LCLC-24 | 24" | 8" |
| LCLC-30 | 30" | 8" |
| LCLC-36 | 36" | 8" |

INCANDESCENT BASED ORDERING INFORMATION


Example: LCLC-24-4E26-NL-W2-CTA

LCLC


| Size | LED | | | | | Kelvin | Cage | Finish | Diffusers | Options |
|------|------|-------|---------------|-----------|-------------|--------------------------------|------|---------------------------------------|--|--------------------|
| | | Watts | Source Lumens | Dimming | Energy Star | NL Lamps provided by others | | (See Notes) See finishes on page 5 | WLA White Linen Acrylic CTA Chocolate Textured Acrylic Optional Trim Options (Consult Factory) SLA Sable Linen Acrylic RTA Rapid Textured Acrylic BTA Black Textured Acrylic | CF - Center Finial |
| 12 | 2E26 | | | TRIAC/ELV | | | | | | |
| 15 | 2E26 | | | TRIAC/ELV | | | | | | |
| 19 | 3E26 | | | TRIAC/ELV | | | | | | |
| 24 | 4E26 | | | TRIAC/ELV | | | | | | |
| 30 | 4E26 | | | TRIAC/ELV | | | | | | |
| 36 | 6E26 | | | TRIAC/ELV | | | | | | |
| | 8E26 | | | TRIAC/ELV | | | | | | |



Standard Finishes

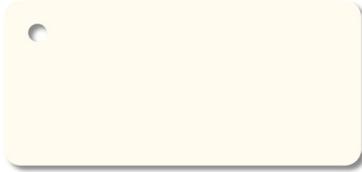

W1 Yolk

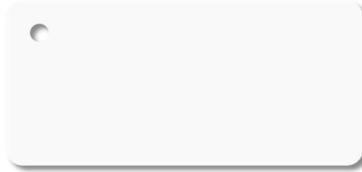

W2 Gloss White



W3 Textured White



W13 Pearl Beige



B1 Satin Black



B2 Textured Black



Z3 Textured Bronze




Z1 Satin Bronze



M13 Anodized Silver



T4 Shimmer Gray

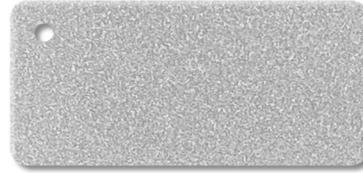

T6 Pewter



T1 Silver Gray



T5 Textured Silver



M17 Brass Powder

Premium Finishes - Contact Factory For Pricing



U12 Parkers Blue



U13 Cornflower Blue



A15 Medium Gray



G13 Sage Green



W18 Sand Fossil



R4 Deep Red



M20 Tuscan Sun



D12 Butterscotch

DISCLAIMER:

Colors displayed on your screen may vary slightly from the actual product color due to differences in monitor calibration and lighting conditions. Sample chips are available upon request. **Not all finishes are available with all fixtures. Please consult factory for premium finishes.**

