One design language.
Two ways to light a space.

FERC-LED flush mount and FERH-LED pendant
Three-step spun steel. Smooth acrylic diffusion. CRI >90.



FERC-LED

Flush mount
24 in diameter | 7½ in high

FERH-LED

Single-stem pendant
24 in diameter | 24 in standard OAH

CRI >90
Standard color rendering


UL / CUL
Damp location listed

MADE IN AMERICA
BABA-compliant options

FERC-LED

A refined ceiling bowl for corridors, guestrooms and common areas.



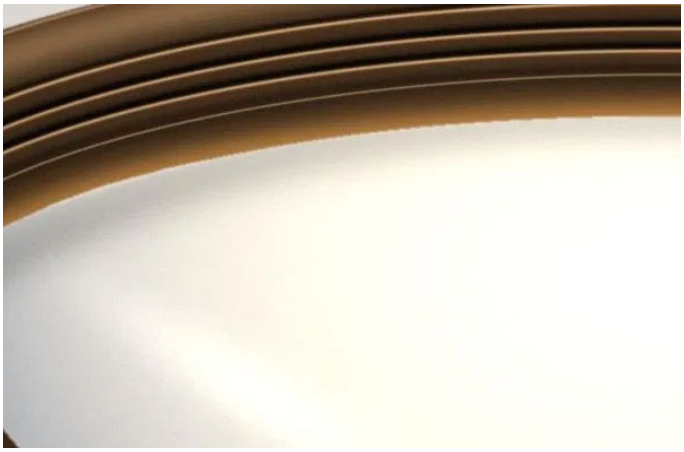

FERC-24

7½ in H × 24 in diameter
Keyhole slots for standard J-Box installation.

24 in DIAMETER	7½ in HEIGHT	FLUSH MOUNT



Close to the ceiling.

A three-step handspun steel ring frames a white smooth acrylic bowl for evenly diffused ambient illumination.

Available options
Concealed occupancy sensor (OCCHFA); 347V input; battery backup for 0-10V configurations.

Finish flexibility
Non-VOC powder-coat and low-VOC metal finishing options. Consult factory for custom finishes.

FERH-LED

A coordinated pendant for lobbies, dining areas and gathering spaces.



FERH-24

15½ in H × 24 in diameter
24 in standard overall height (OAH).
Specify overall height when ordering.

24 in DIAMETER

45° SWIVEL

ADJUSTABLE HEIGHT



Suspended with purpose.

Single-stem 1SLM45 suspension with a 45-degree swivel and field-adjustable height. Keyhole slots provide standard J-Box installation.

Available options
AC-STEM extension for increased overall height; concealed occupancy sensor (OCCHFA); battery backup for 0-10V configurations.

The same three-step steel ring and acrylic diffuser as the companion FERC flush mount.

Specify with confidence

Shared LED performance, with mounting and model-specific options clearly defined.

Color quality	CRI >90; standard 3-step MacAdam binning
Color temperatures	2700K / 3000K / 3500K / 4000K / 5000K
Input voltage	120-277V universal; 347V optional on FERC only
Controls	0-10V standard; TRIAC/ELV on qualifying configurations
LED system	Field-replaceable LED module; integral driver
Lumen maintenance	>60,000 hours
Listings	UL and CUL listed for damp locations
Warranty	5-year LED component warranty; optional 10-year available

Wattage and source lumen selections: consult factory for the configuration table. Battery backup is available for 0-10V configurations only. Confirm BABA-compliant selection at ordering.

Finish palette

STANDARD

Satin Black | Textured Black | Anodized Silver | Satin Bronze | Brushed Nickel Powder

OPTIONAL

Deep Red | Textured Black | Sand Fossil | Brass Powder | Sage Green | Butterscotch | Tuscan Sun

Silver Gray | Pewter | Parker Blue | Cornflower Blue | Textured White | Medium Gray | Antique Brass

Finish samples are illustrative; request physical samples. Custom finishes: consult factory. Warranty applies to LED components.

Learning and everyday living

Explore the collection across hospitality, commercial and institutional interiors.



Healthcare corridors



Student living



Library and study spaces

Retail and entertainment

Explore the collection across hospitality, commercial and institutional interiors.



Jewelry and specialty retail



Cinema corridors