

GFWW-LED

Construction:

- Polycarbonate housing
- Diffuser is frosted smooth polycarbonate


Light Source:

- LED
- Line Dimming **Included**

Notes:

- Mounts to standard junction box
- Center lockup
- Vandal Resistant
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - 120 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

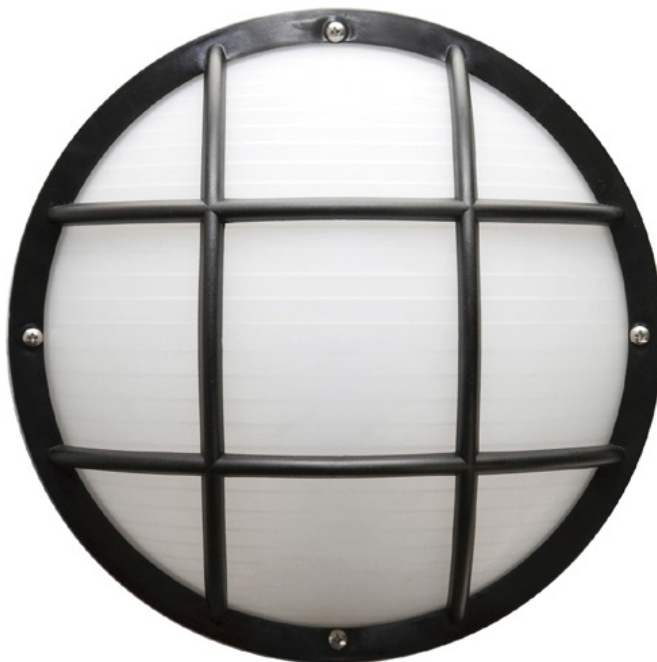

GFWW-10

Diameter - 10 1/4"

Depth - 5"



ORDERING INFORMATION

Example: GFWW-10-LED-F10-4-W99-WFP

GFWW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
					2 3000K 4 4000K		B99 Black W99 White	FSP Frosted Smooth Polycarbonate	DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page	
10-LED	J1A	13	900	TRIAC/ELV	YES				ES Energy Star listed components 90CRI Consult Factory	
									Optional Voltage -347V Input voltage to 347v	



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

