

MERW-600-LED

Construction:

- Steel housing and chassis
- Diffuser is .10 extruded white acrylic
- $\frac{3}{8}$ " Sq Accent bars and rings are extruded aluminum

Light Source:

- LED
- Dimming to 10% **Included**

Notes:


- Keyhole slots top and bottom
- Top and bottom white acrylic lens - standard
- Not all material and accent styles are available
- Optional photocell (21) increases fixture depth 1 $\frac{1}{2}$ "
- Optional lens cover (ALC) eliminates up/down light
- Optional battery backup
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

- You may also like the [MANW](#) or [MENW](#) Series


Type:	
Job Name:	



DESIGN OPTIONS (Choose your cage design)

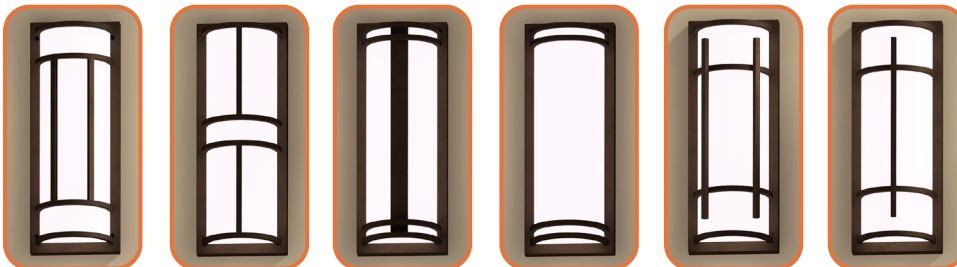

MERW-A MERW-B MERW-C MERW-D MERW-E MERW-F^{D1}

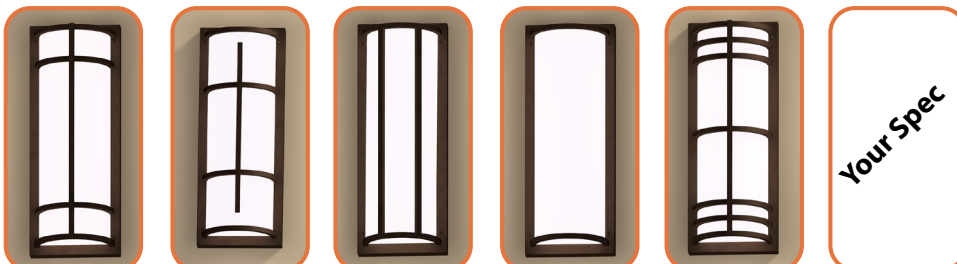


MERW-G^{D1} MERW-H^{D1} MERW-I MERW-J MERW-K^{D1} MERW-X

⁽¹⁾ Contact factory for assistance

Fixture Overall Dimensions

- "H" - 12" - 16" - 18" - 26" - 38" - 50"
- "W" - 6 $\frac{1}{2}$ "
- "D" - 4"
- "D1" - 4 $\frac{3}{8}$ "
- "MC" - 6" - 8" - 9" - 13" - 19" - 25"
- See 900 or 1100 Series for other width options




28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286
www.lightwayind.com • sales@lightwayind.com




Revision: 09/14/2026

OPTIONAL CAGE ACCENTS (Not required, leave blank if undesired)


1) Optional Accent Location (Shown as "A" cage. Others are Similar)




(SC)
Screen
Complete



(CC)
Center
Complete




(CH)
Center
Half




(EC)
End
Complete


2) Accent Material (Required if Accent is chosen)




(S) Solid



(P) Perforated



(M) Mesh



(W) Waffle



(X) Custom⁽¹⁾

⁽¹⁾ Contact factory for assistance

ACCENT AVAILABILITY CHART BY CAGE STYLE

	A	B	C	D	E	F-H	I	J	K
SC	S,P,M,W	S,P,M,W	S,P,W	S,P,M,W		S,P,M,W	S,P,W	S,P,M,W	S,P,W
CC	S,P	S,P,M,W	S,P,W	S,P,M,W		S,P,M,W	---	---	S,P,W
CH	S,P,M,W	---	---	---		---	S,P,M,W	---	---



MERW-600-LED

ORDERING INFORMATION

Example: **MERW-626-LED-O2C-4-G-T4-WSA**

MERW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
612-LED	F1O	10	1065	TRIAC/ELV	YES	2 3000K 3 3500K 4 4000K	A	B1 Satin Black	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory
	F1P	15	1724	TRIAC/ELV	YES		B	B2 Text Black		
	F1H	13	1475	0-10v	NO		D	Z1 Satin Bronze		
616-LED	O1C	9	1210	0-10v	NO		E	Z3 Text Bronze	Optional Cage Accents (See Page 2)	21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt
	L1B	13	1407	0-10v	NO		F	W1 Yolk White		
618-LED	O2A	12	1600	0-10v	NO		G	W2 Gloss White	Material F Filigree P Perforated Screen M Wire Mesh W Waffle Pattern	ALC Aluminum Lens Cover - <i>See Notes</i> ES Energy Star listed components
	L1B	13	1407	0-10v	NO		H	W3 Text White		
626-LED	O2C	18	2420	0-10v	NO		I	T4 Shimmer Gray	Style SC Screen Complete CC Center Complete EC Ends Complete	Optional Voltage -347V Input voltage to 347v
	L2B	26	2814	0-10v	NO		J	M13 Anod Silver		
638-LED	O3C	27	3630	0-10v	NO		K	T6 Pewter	CH Center Half OX Custom	Battery Backup Options <i>(Available with 0-10v only)</i> BB10 10 Watts (1170lm) for 90-Minutes
	L3B	38	4221	0-10v	NO		X	W13 Pearl Beige		
650-LED	O4C29	29	3412	0-10v	NO			Optional (See Price List) M17 Brass Powder P2 Brushed Alum P9 Brushed Nickel		
	O3C	27	3630	0-10v	NO					
	O4C	36	4840	0-10v	NO					
	L4B	51	5628	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286
 www.lightwayind.com • sales@lightwayind.com



Revision: 09/14/2026