

Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.
- (4) Sets of 3/8" sq Aluminum bars accent the side of the lens


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Mounting Kit Included for standard J-box
- The LCBC has a typical leadtime of 6 weeks, consult with factory for any minimum order quantities and setup fees
- UL and CUL listed **DAMP** location
- LED Array
 - Replaceable Module
 - CRI > 80
 - Dimming (10% or 1%)
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components
- For a pendant mounted version see the **LCBH**



Type:	
Job Name:	

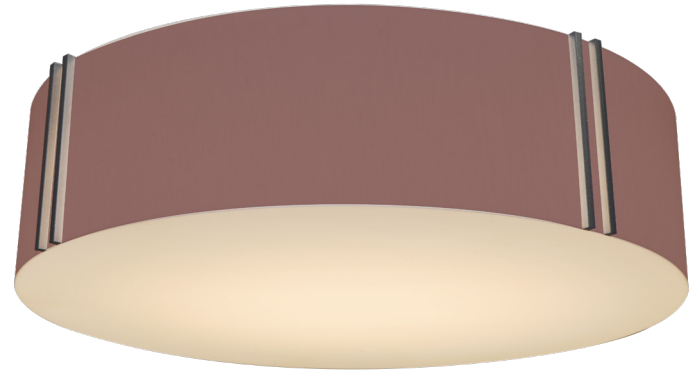


Shown with Rapid Textured Acrylic Side Lens



DIFFUSER OPTIONS

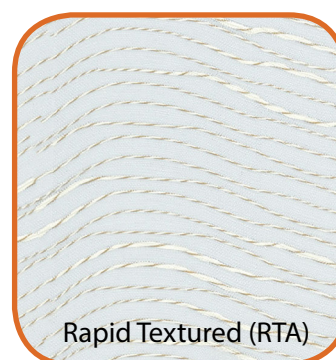

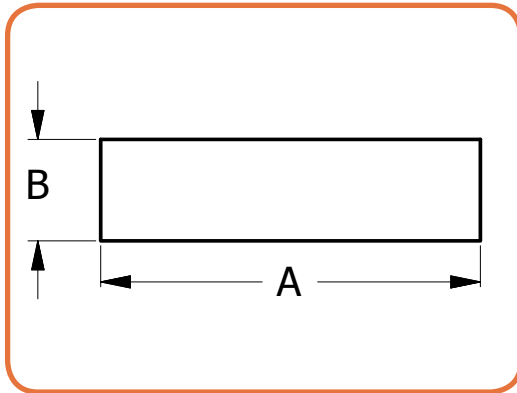

Shown with Battery Backup Extension Ring

	DIM 'A'	DIM 'B'
LCBC-12	12.25"	4.5"
LCBC-15	15"	4.5"
LCBC-19	19"	5.25"
LCBC-24	24"	8"
LCBC-30	30"	8"
LCBC-36	36"	8"

ORDERING INFORMATION

Example: LCBC-15-LED-F1Q-4-W2-CTA-DIM

LCBC

Size	LED					Kelvin	Cage	Finish	Diffusers	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K				
12-LED	F1L	9	1400	0-10v	YES	Optional 3 3500K	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder	WLA White Linen Acrylic CTA Chocolate Textured Acrylic Optional Trim Options (Consult Factory) RTA Rapid Textured Acrylic BTA Black Textured Acrylic Bottom Diffuser WTA White Textured Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page ES Energy Star listed components 90CRI Consult Factory OCCHFA Concealed Occupancy Sensor See Sensor Resource Sheet Battery Backup Options (Requires 1 3/4" extension ring) Available in LCBC-15, 19 & 24 BB10 10 Watts (1170lm) for 90-Minutes	
	F1O	10	1065	TRIAC/ELV	YES					
	F1P	15	1724	TRIAC/ELV	YES					
15-LED	F1K	13	2115	0-10v	YES					
	F1P	15	1724	TRIAC/ELV	YES					
	F1Q	23	2540	TRIAC/ELV	YES					
19-LED	L1A	36	4000	0-10v	NO					
24-LED	L1A	36	4000	0-10v	NO					
30-LED	O4C	36	4840	0-10v	NO					
36-LED	O8C	72	9680	0-10v	NO					
	O12C	107	14520	0-10v	NO					
	8E26		0	TRIAC/ELV	NO					



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

