

Construction:


- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic

Light Source:

- LED
- Dimming to 10% **Included**


Notes:

- Integral mounting plate; Hardware include
- Mounts on a Standard J-Box
- Lens on all five sides
- Optional battery backup
- Optional photocell (21) increases fixture depth ½"
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
 - Build America, Buy America Act Compliant
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components



	W	H	D	Mount-Center
-627	6"	27"	5"	13 1/2"
-638	6"	38"	5"	19"

Type:	
Job Name:	

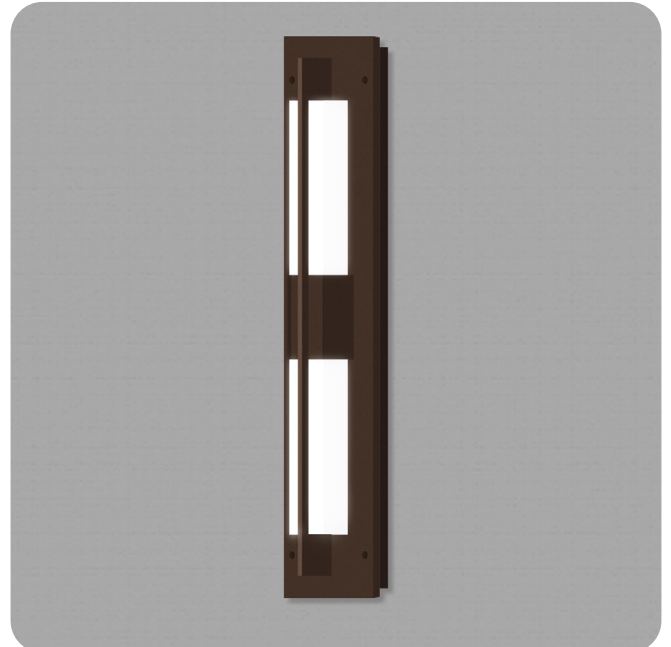

ORDERING INFORMATION

Example: TEDW-627-LED-O2C-3-Z3-WSA

TEDW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
627-LED	O2C	18	2420	0-10v	NO	1 2700K		B1 Satin Black	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
638-LED	O3C	27	3630	0-10v	NO	2 3000K		Z1 Satin Bronze		DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page
						3 3500K		Z3 Text Bronze		
						4 4000K		W1 Yolk		
						5 5000K		W2 Gloss White		
								W3 Text White		
								B2 Text Black		
								T4 Shimmer Gray		
								M13 Anod Silver		
								T6 Pewter		
								W13 Pearl Beige		
								Optional (See Price List)		
								P2 Brushed Alum		
								M17 Brass Powder		
										21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt
										42 All Aluminum Construction
										Battery Backup Options BB10 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286
www.lightwayind.com • sales@lightwayind.com

